

φ23 2.0/16mm C		
FOCAL LENGTH	f=16mm	
MAX. DIAMETER (RATIO)	F=1 : 2.0~22	
ELEMENT	9 GROUPS 11 ELEMENTS	
PICTURE SIZE	13.8×18.4mm	
ANGLE	VER. ANGLE HOR. ANGLE DIA. ANGLE	47.2° 60.6° 72.0°
DISTORTION (TV)	0.02%	
SHOOTING RANGE AT	VER. MINIMUM FOCUS DISTANCE	101 mm HOR. DIA. 135 mm 168 mm
MINIMUM FOCUS DISTANCE	0.1m	
FLANGE BACK	17.526mm in air	
BACK FOCUS	13.0mm in air	
FILTER SCREW SIZE	M40.5×0.5	
FRONT/REAR EFFECTIVE DIA.	FRONT φ31.2mm REAR φ16.5mm	
MOUNT	C-MOUNT	
EXIT PUPIL	-26.2mm	
TEMPERATURE RANGE	-10~+50° C	
STORAGE TEMPERATURE RANGE	-20~+60° C	
RESOLUTION CENTER/CORNER	CENTER 160本/mm CORNER 80本/mm	
LENS COATING	WIDE BAND MULTI COATING	
WEIGHT	250 g	

NOTE: Specifications and availability are subject to change without notice
注)本仕様については、予告なしに変更する場合があります。




尺度	1/1	承認	八木	製図	富永
機種名	φ23 F2.0 f=16mm				
機種番	LM16XC				

2010.06.03 作成年月日




LM16XC

Distortion at Infinity

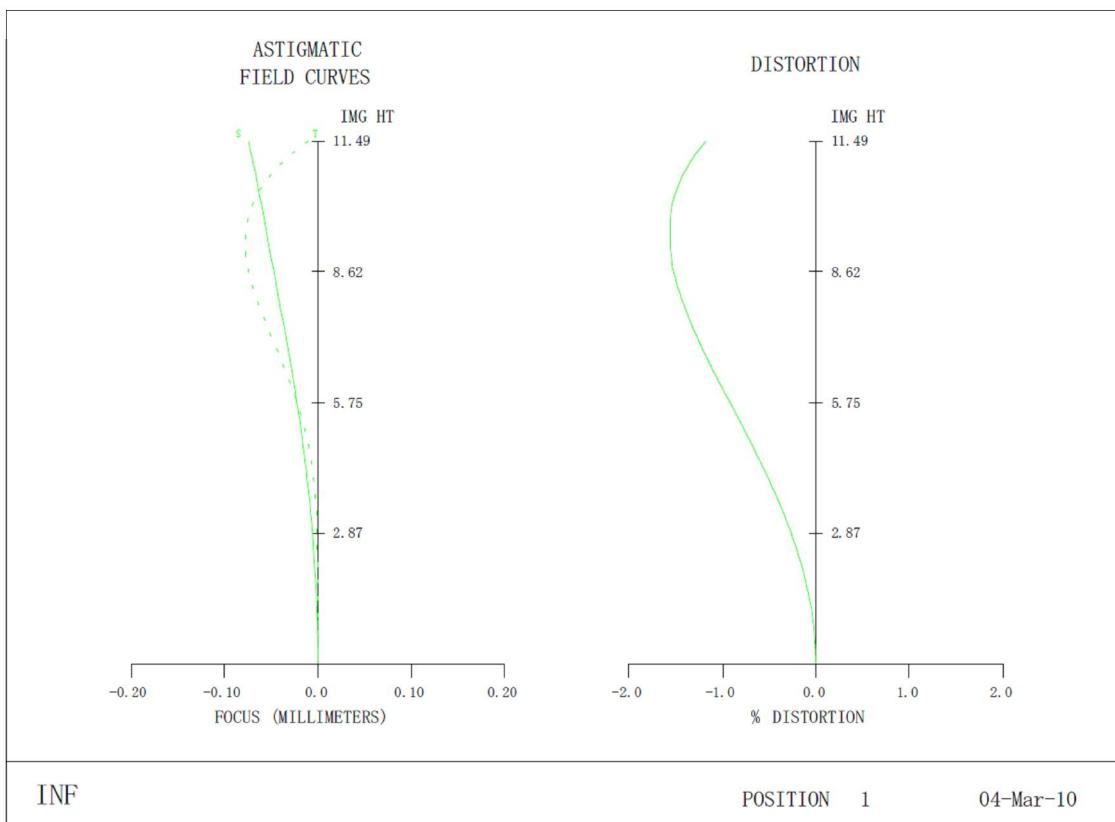

Distortion at 100mm

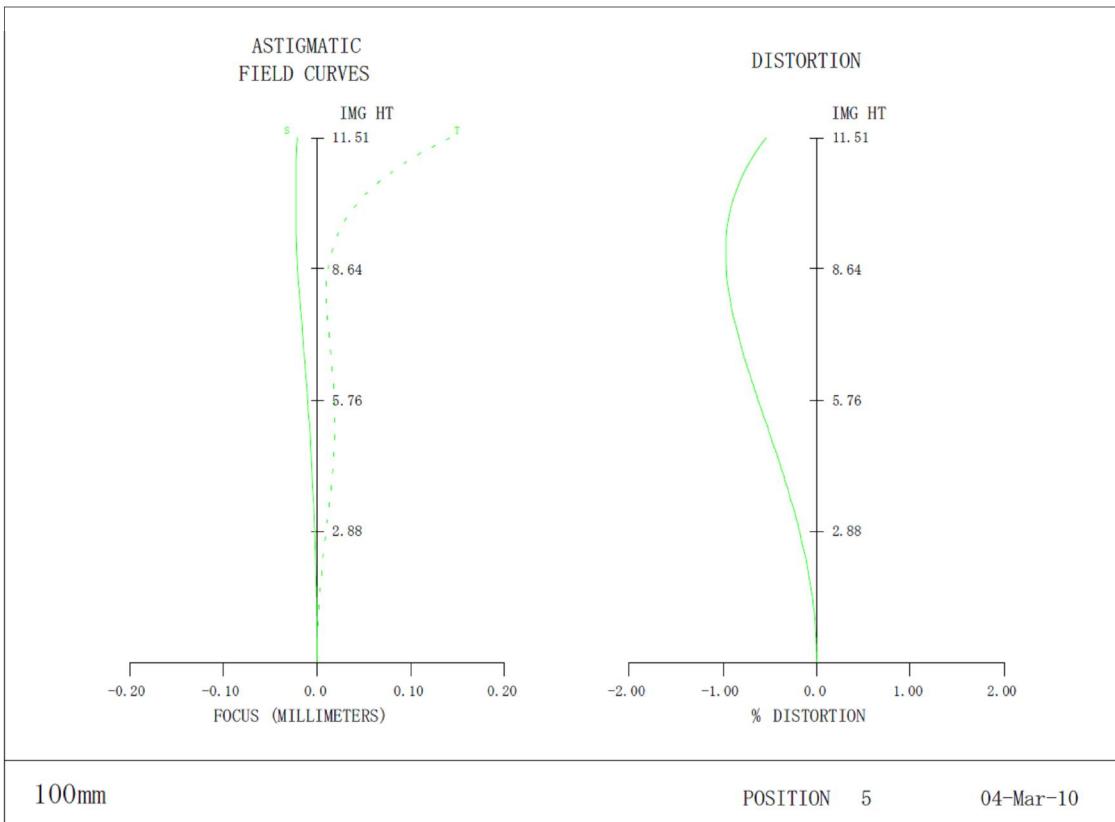





LM16XC

F-stop: 2.0

Working Distance: Infinity

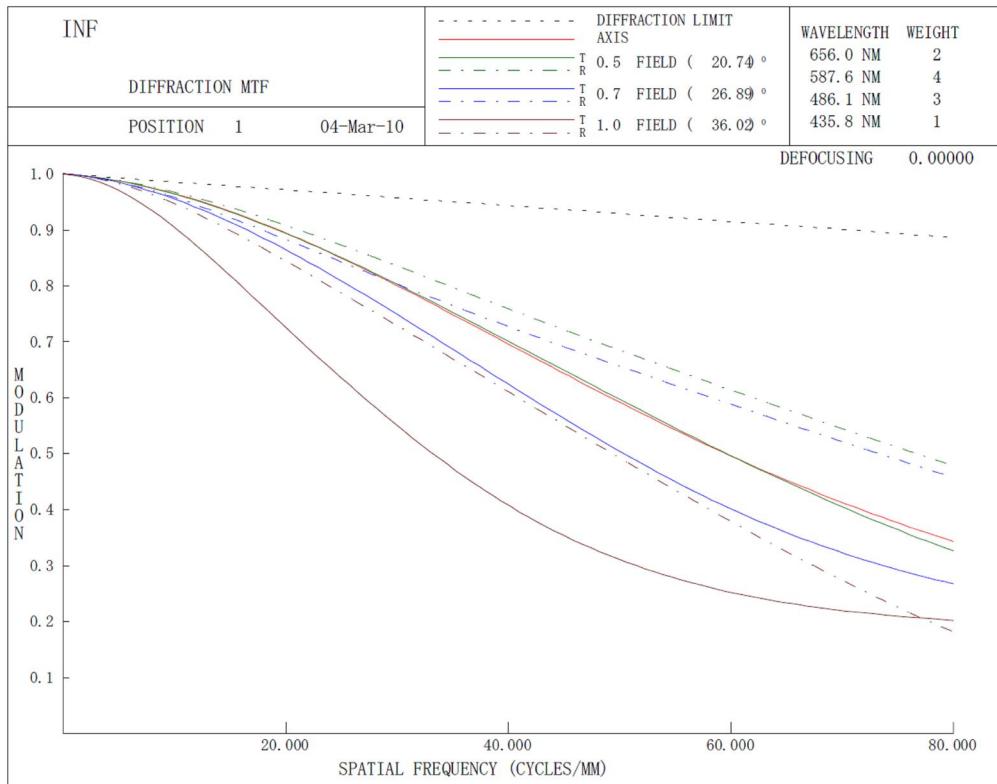

Working distance: 300mm

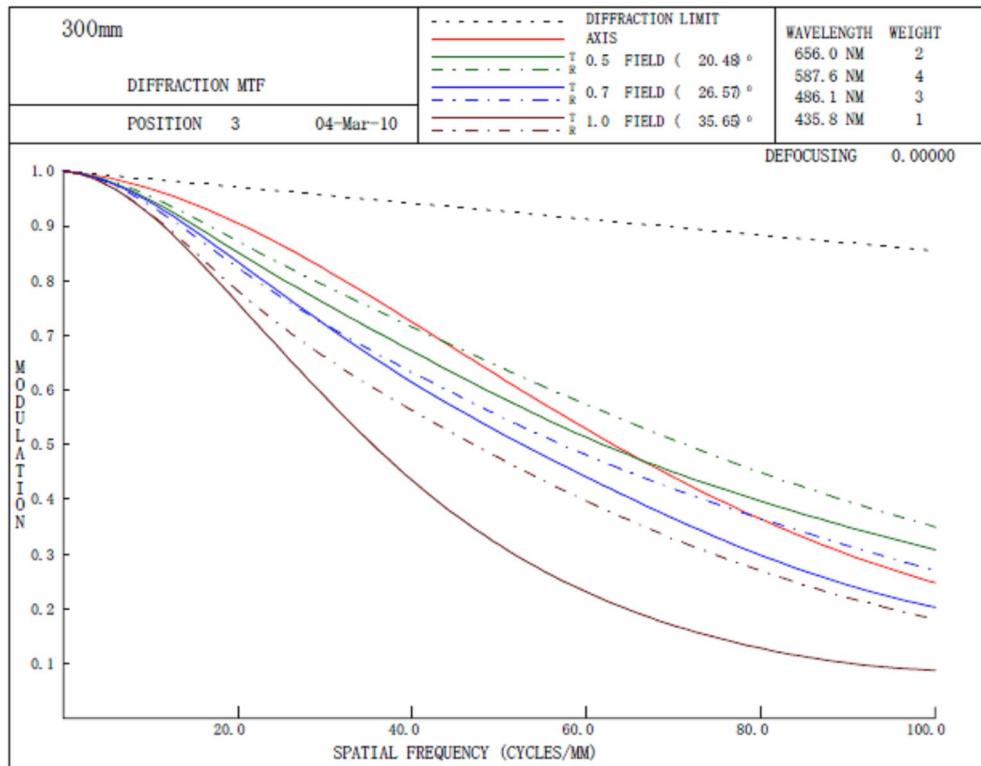



LM16XC

Relative Illumination

