




2/3" 1.8/25mm C		1/2"	1/3"
FOCAL LENGTH	f=25mm		
MAX. DIAMETER (RATIO)	F=1:1.8~16		
ELEMENT	9 ELEMENTS 10 GROUPS		
PICTURE SIZE	6.6x8.8mm	4.8x6.4	3.6x4.8
ANGLE	VER. ANGLE	15.1°	11.0°
	HOR. ANGLE	20.0°	14.6°
	DIA. ANGLE	24.9°	18.2°
DISTORTION (TV)	-0.09%		
SHOOTING RANGE AT	VER.	27.5mm	20.0mm
MINIMUM FOCUS	HOR.	36.7mm	26.7mm
DISTANCE	DIA.	46.0mm	33.4mm
MINIMUM FOCUS DISTANCE	0.1m		
FLANGE BACK	17.526mm in air		
BACK FOCUS	17.9mm in air		
FILTER SCREW SIZE	M25.5x0.5		
FRONT/REAR EFFECTIVE DIA.	FRONT Ø18.4mm REAR Ø18.4mm		
MOUNT	C-MOUNT		
EXIT PUPIL	-84.4		
TEMPERATURE RANGE	-10~+50° C		
STORAGE TEMPERATURE RANGE	-20~+60° C		
RESOLUTION CENTER/CORNER	CENTER 200lp/mm CORNER 160lp/mm		
LENS COATING	WIDE BAND MULTI COATING		
WEIGHT	95 g		




		尺 度	1/1	承 認	八木	製 図	富永
		機 種 名	2/3" F1.8 f=25mm				
		機 種 番	LM25JC10M				
09.09.01	作成年月日						

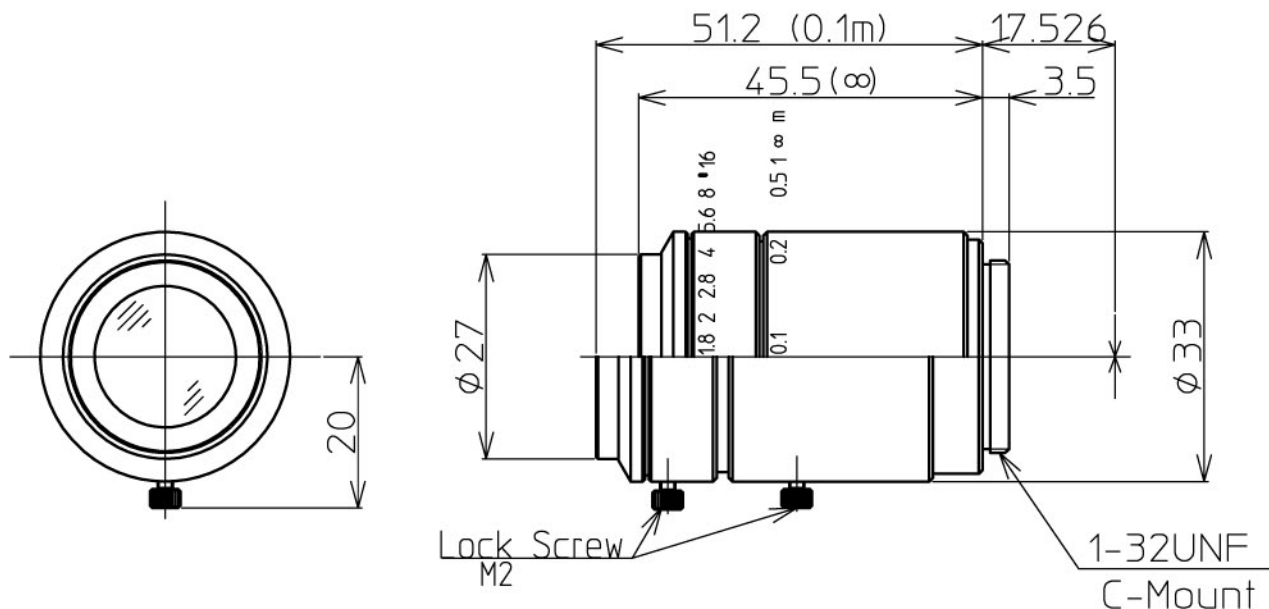

2/3" F1.8/25mm Distortion

OBJ 0.3m

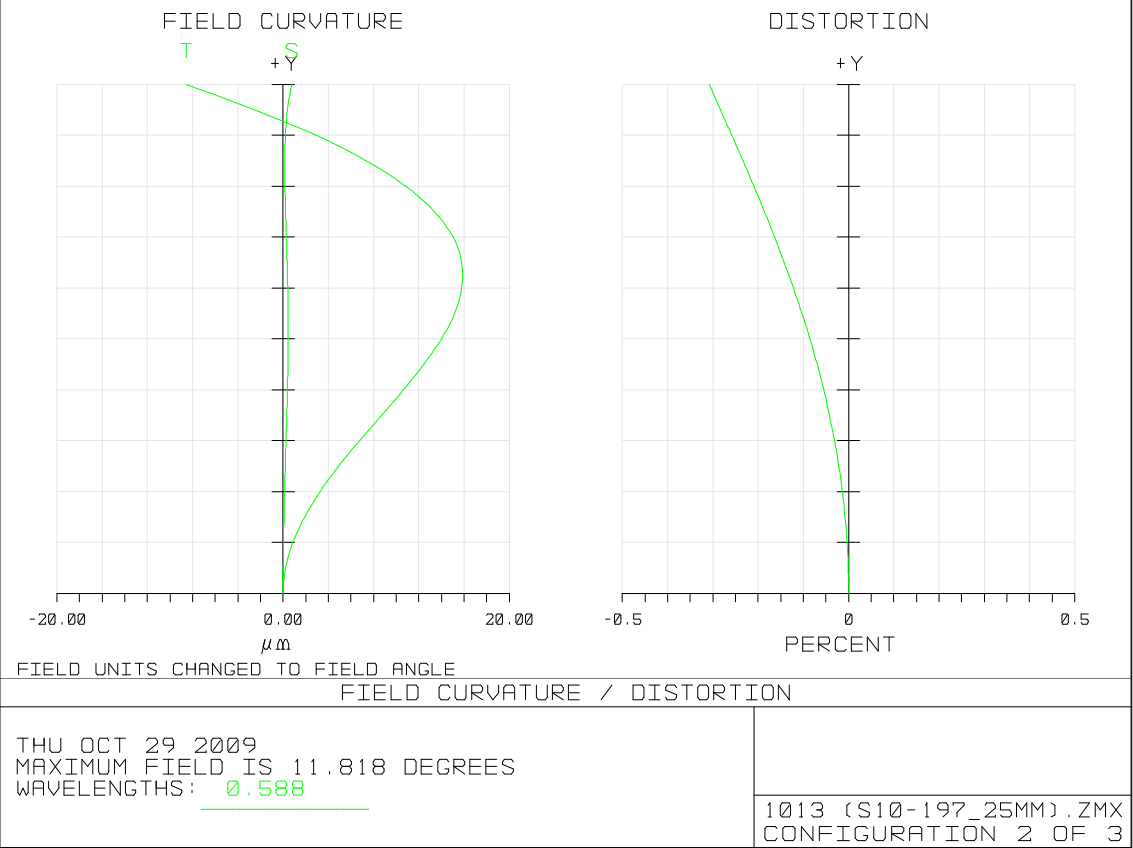





LM25JC10M

(2/3" F1.8/25mm MTF)

OBJECT: ∞ m F/1.8

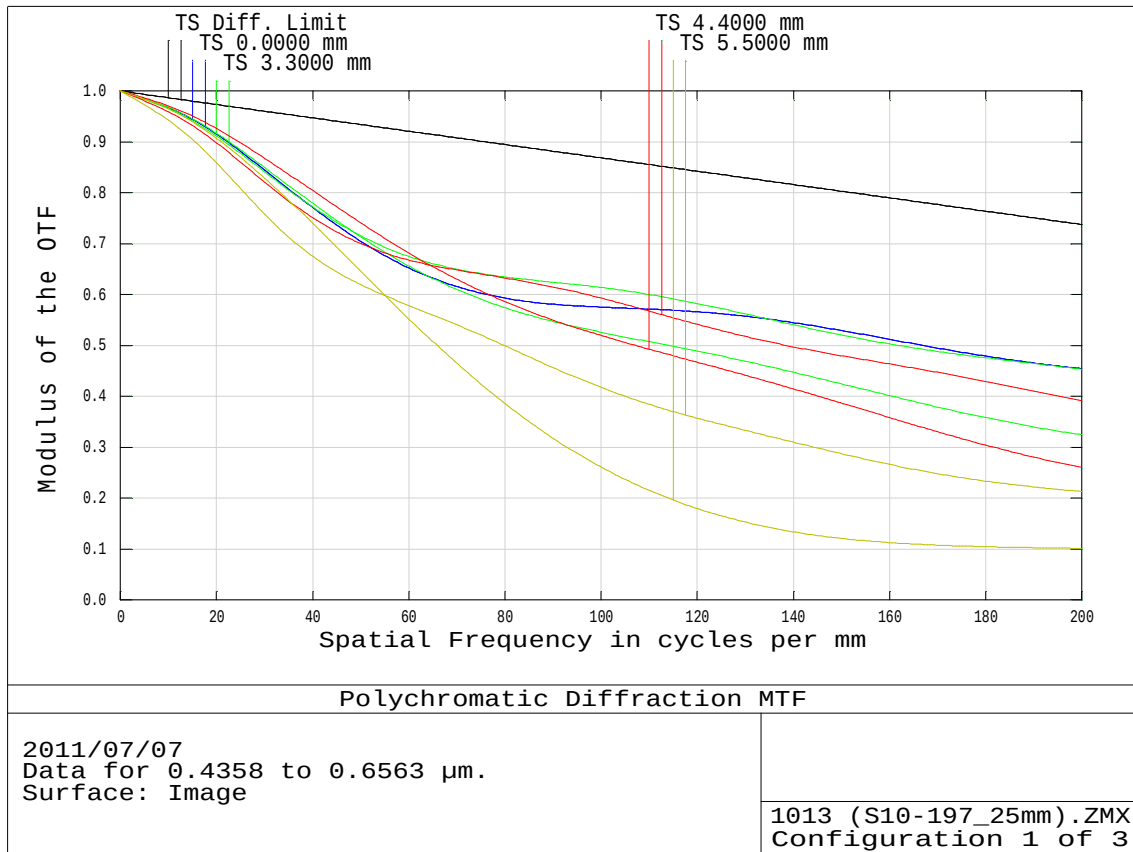


OBJ 0.3m

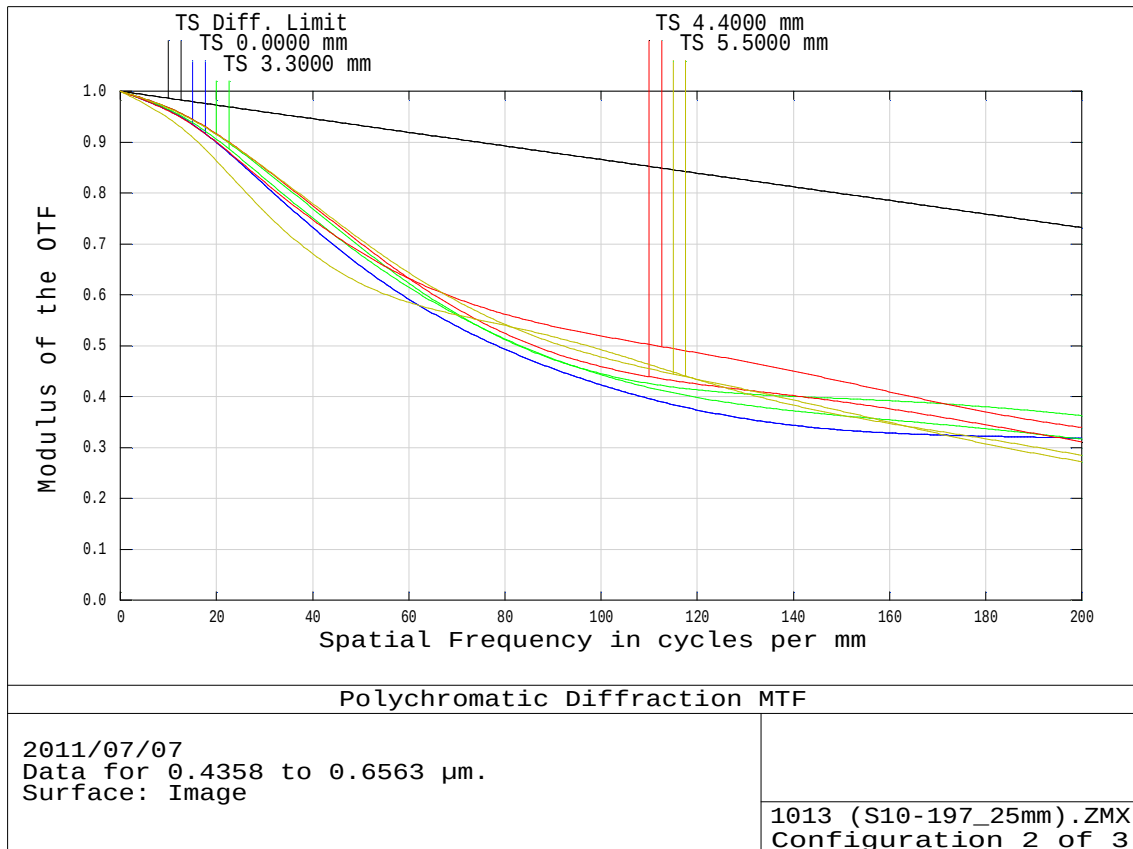



RELATIVE ILLUMINATION VERSUS RELATIVE FIELD

LM25JC10M

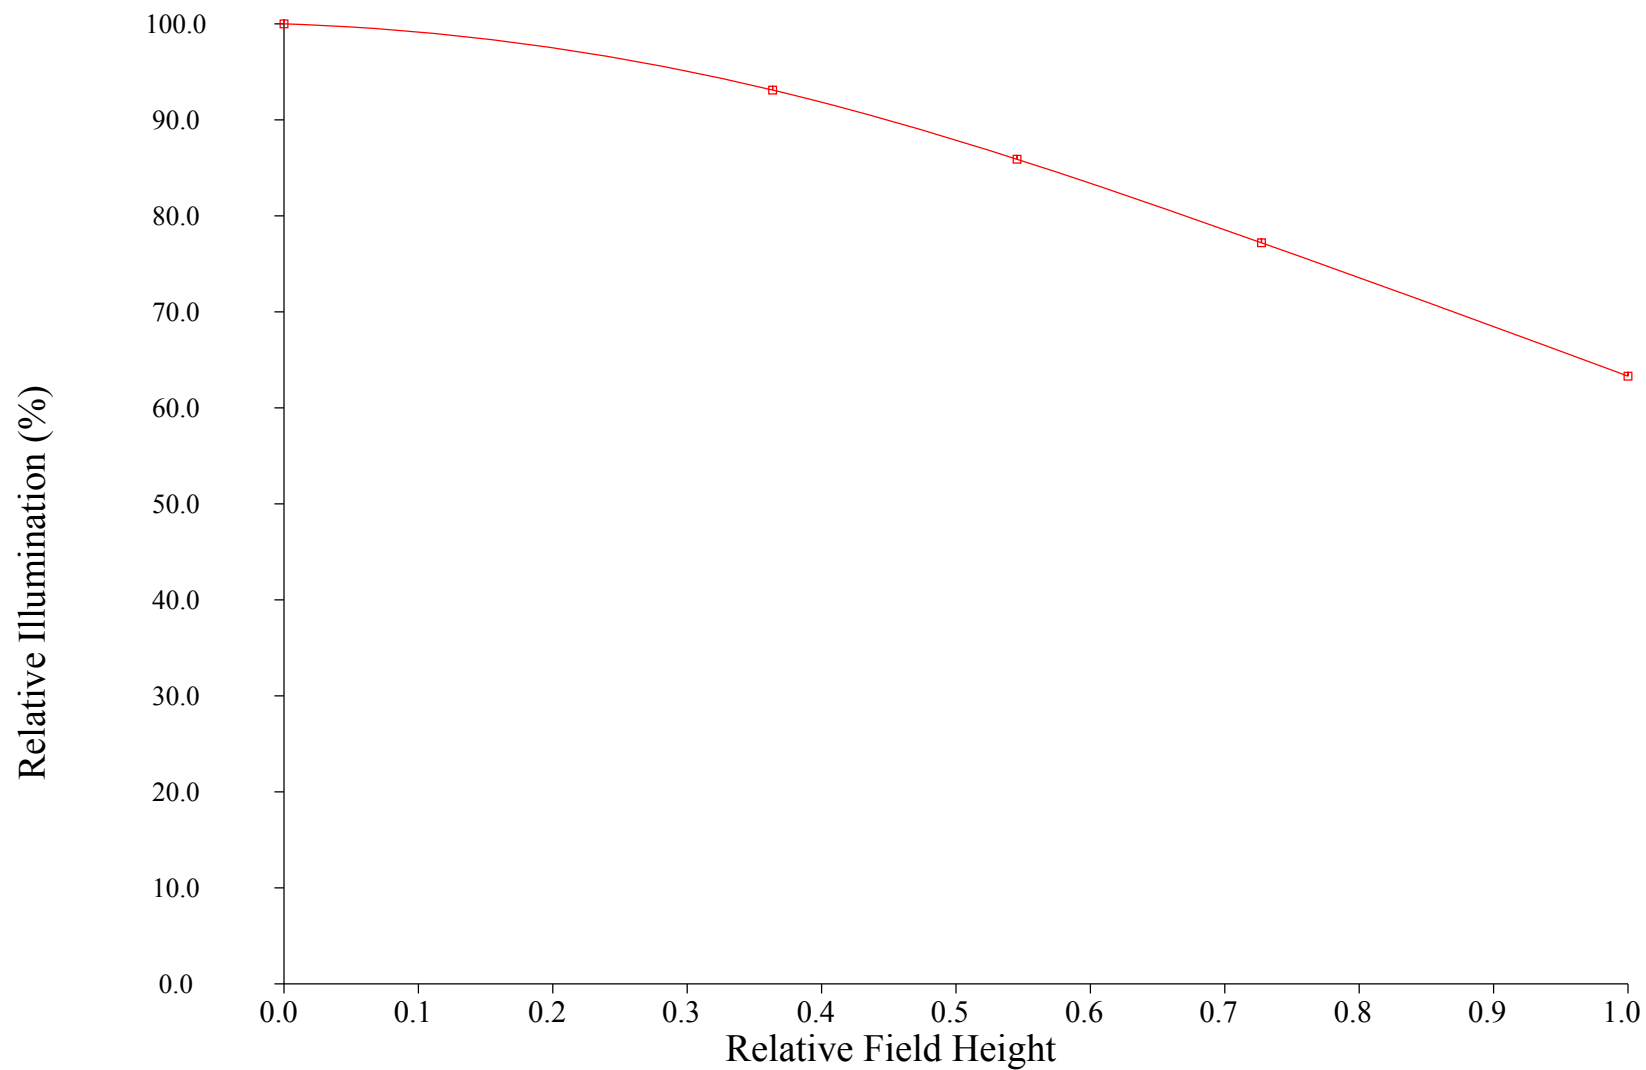



LM25JC10M 透過率

