




2/3" 1.4/25mm C		1/2"	1/3"
FOCAL LENGTH	f=25mm		
MAX. DIAMETER (RATIO)	F=1:1.4,4,8,16		
ELEMENT	6群 8枚		
PICTURE SIZE	6.6×8.8mm	4.8×6.4	3.6×4.8
ANGLE	VER. ANGLE	14.8°	10.5°
	HOR. ANGLE	19.6°	14.0°
	DIA. ANGLE	24.3°	17.5°
DISTORTION (TV)	-0.04%	-	-
SHOOTING RANGE AT	VER.	53.3 mm	38.7
MINIMUM FOCUS	HOR.	71.1 mm	51.7
DISTANCE	DIA.	89.0 mm	64.6
MINIMUM FOCUS DISTANCE	0.2m		
FLANGE BACK	17.526 mm in air		
BACK FOCUS	11.7mm in air (Mechanical 10.2mm in air)		
FILTER SCREW SIZE	M27×0.5		
FRONT/REAR EFFECTIVE DIA.	前φ24.0mm 後φ12.8mm		
MOUNT	C-MOUNT		
EXIT PUPIL	-80.0		
TEMPERATURE RANGE	-10~+50°C		
STORAGE TEMPERATURE RANGE	-20~+60°C		
RESOLUTION CENTER/CORNER	中心100本/mm 周辺 80本/mm		
WEIGHT	g		

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。

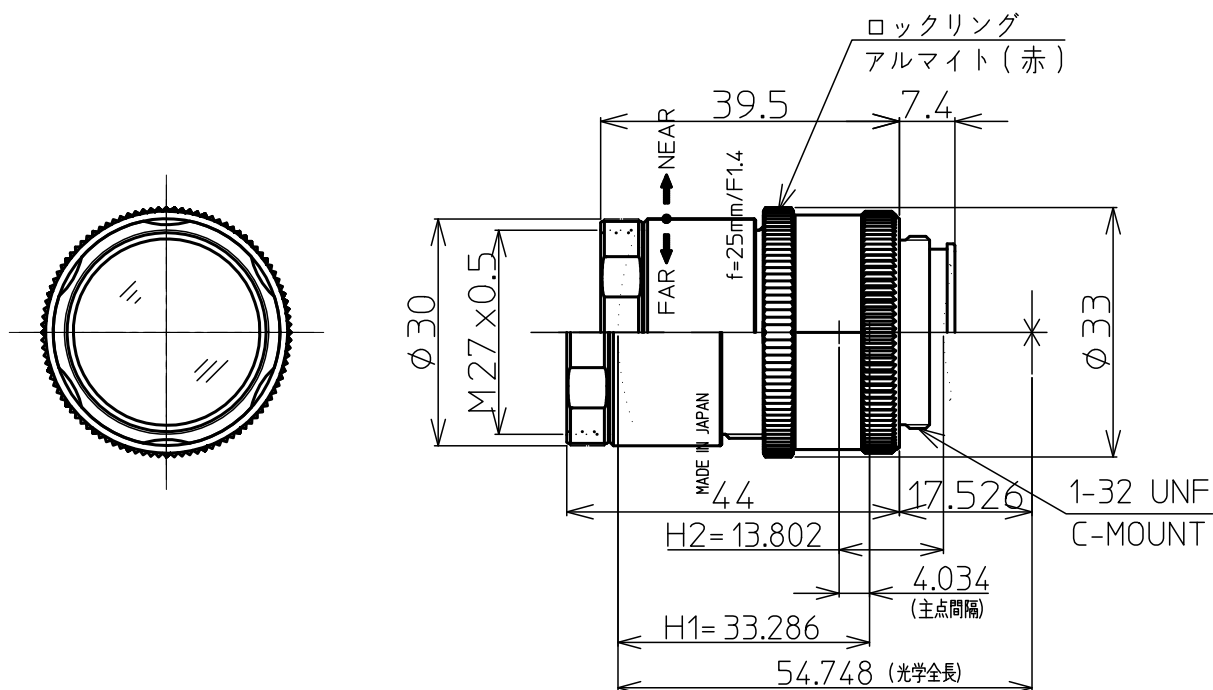

		尺 度	1/1	承 認	八木	製 図	八木
		機 種 名	2/3" F1.4 f=25mm				
2014.2.25	作成年月日	LM25JCM-V					



LM25JCM-V Transmission

