

Φ23 2.0/25mm C		
FOCAL LENGTH	f=25mm	
MAX. DIAMETER (RATIO)	F=1:2.0~16	
ELEMENT	6 GROUPS 8 ELEMENTS	
PICTURE SIZE	13.8×18.4mm	
ANGLE	VER. ANGLE	31.1°
	HOR. ANGLE	40.9°
	DIA. ANGLE	50.2°
DISTORTION (TV)	-0.57%	
SHOOTING RANGE AT	VER.	93mm
MINIMUM FOCUS	HOR.	125mm
DISTANCE	DIA.	157mm
MINIMUM FOCUS DISTANCE	0.15m	
FLANGE BACK	17.526mm in air	
BACK FOCUS	24.3mm in air	
FILTER SCREW SIZE	M40.5x0.5	
FRONT/REAR EFFECTIVE DIA.	FRONT Φ31.4mm	REAR Φ18.2mm
MOUNT	C-MOUNT	
EXIT PUPIL	-63.9mm	
TEMPERATURE RANGE	-10~+50°C	
STORAGE TEMPERATURE RANGE	-20~+60°C	
RESOLUTION CENTER/CORNER	CENTER 160本/mm	CORNER 80本/mm
LENS COATING	WIDE BAND MULTI COATING	
WEIGHT	250 g	

NOTE: Specifications and availability are subject to change without notice
注)本仕様については、予告なしに変更する場合があります。




尺度	1/1	承認	八木	製図
機種名	Φ23 F2.0 f=25mm			
機種番	LM25XC			
2010.06.03	作成年月日			




LM25XC

Distortion at Infinity

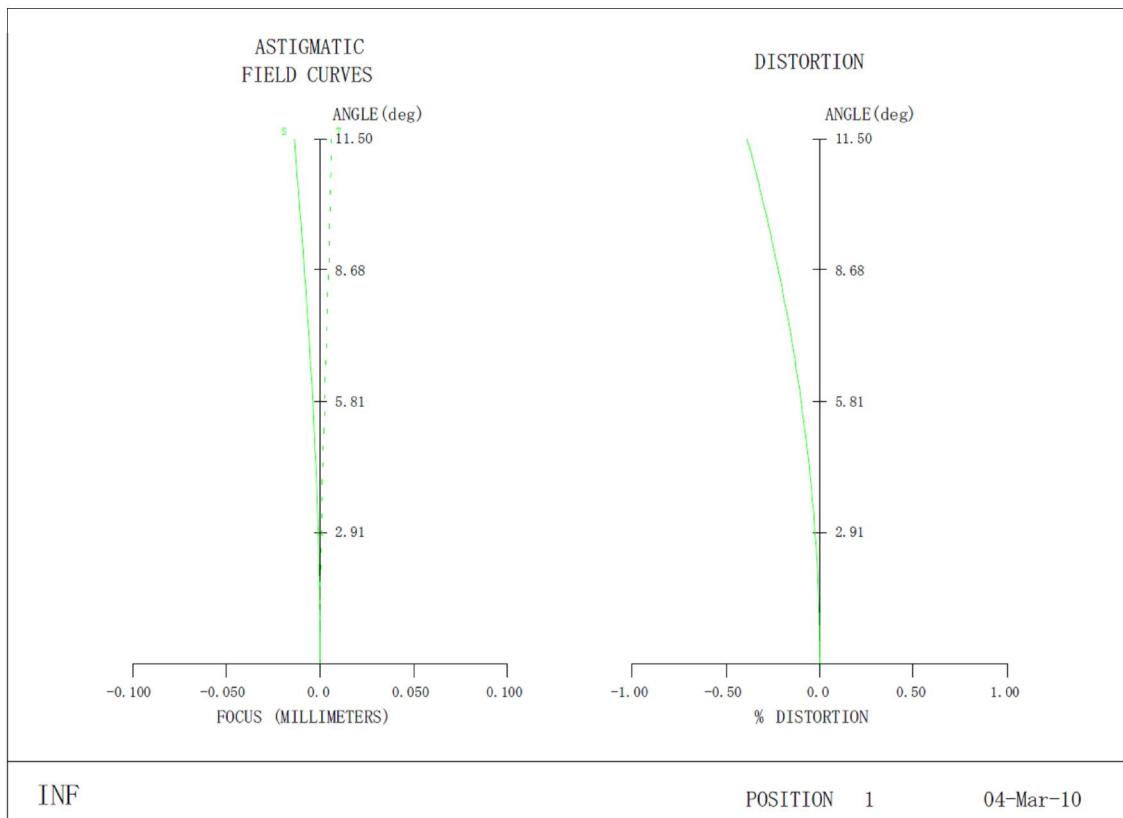

Distortion at 150mm

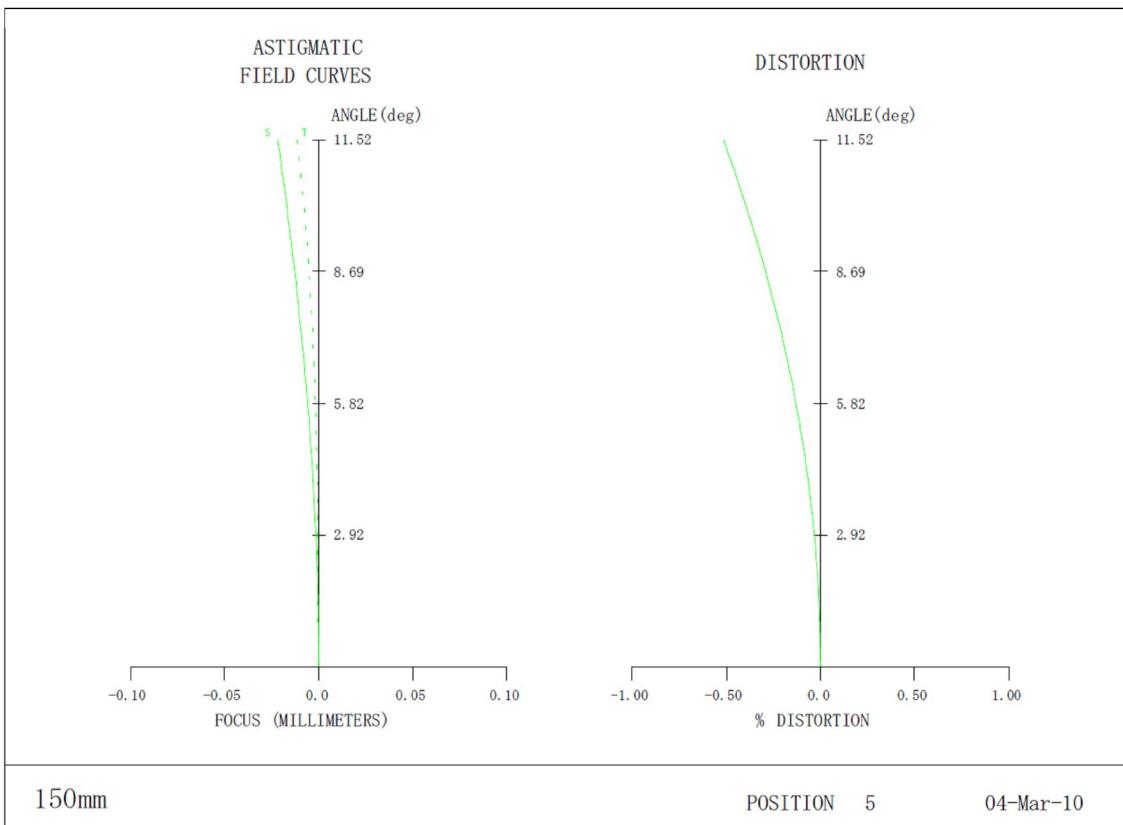





LM25XC

F-stop: 2.0

Working Distance: Infinity

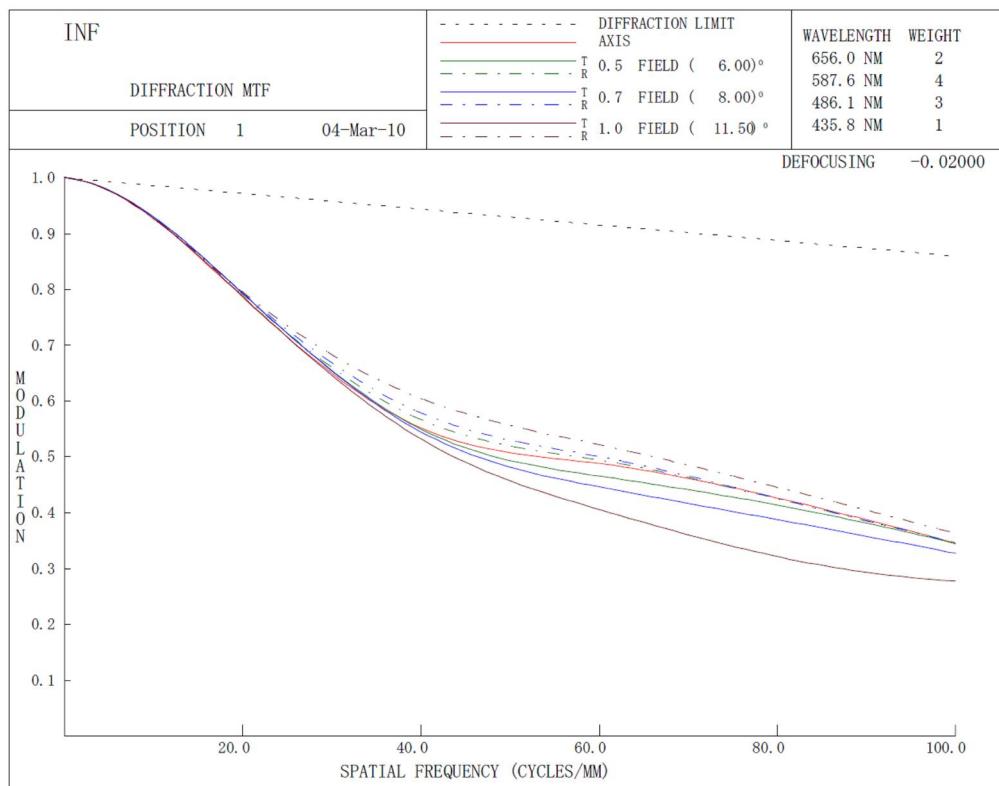


Working distance: 300mm

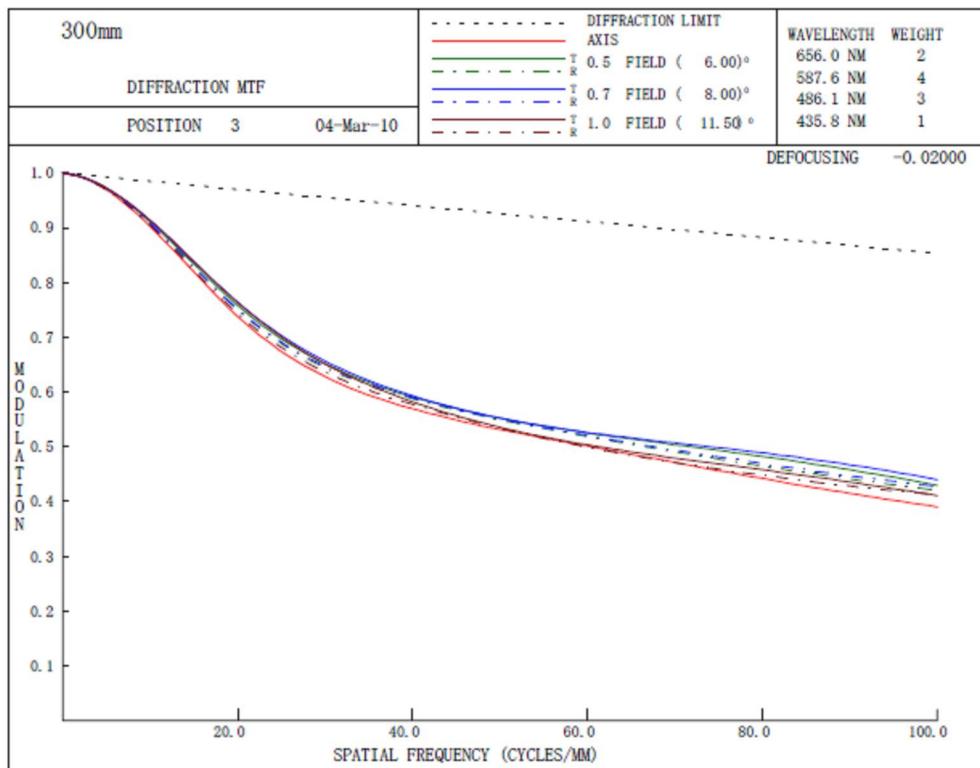



LM25XC

Relative Illumination

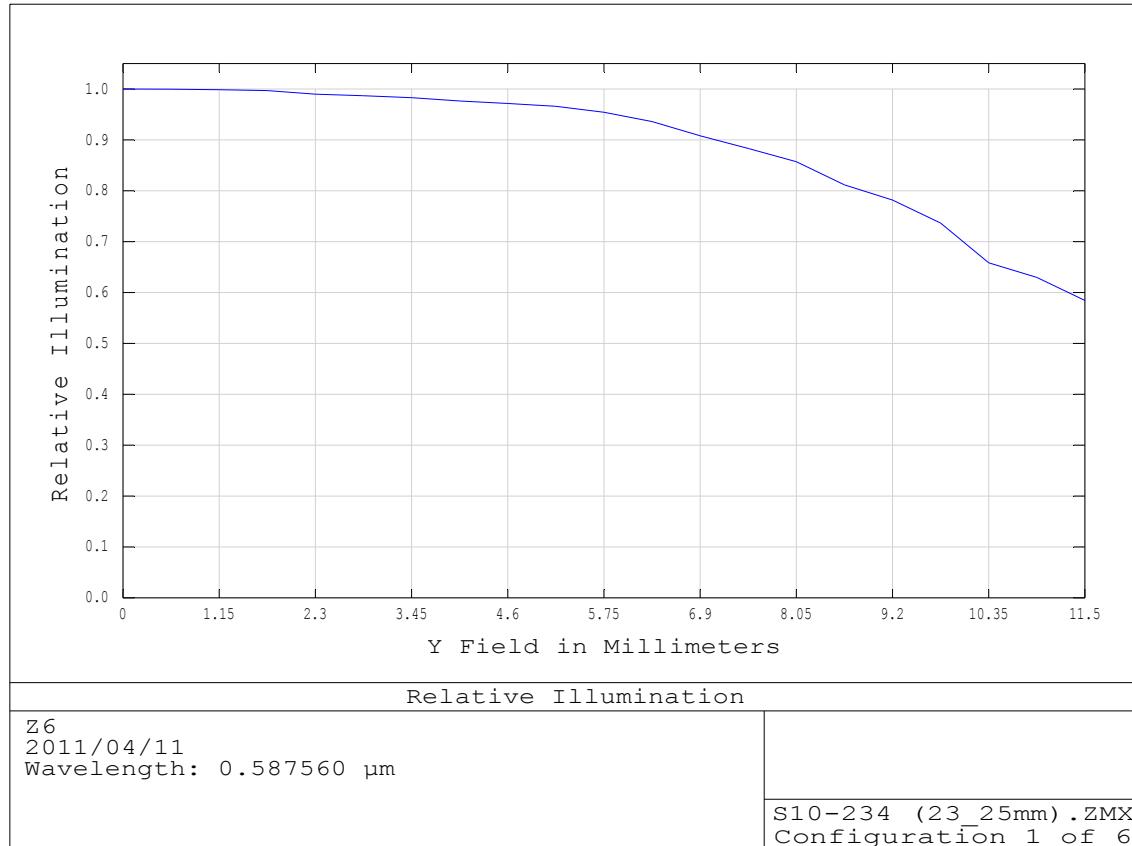



XC-series 透過率

