

φ23 2.0/35mm C		
FOCAL LENGTH		f=35mm
MAX. DIAMETER (RATIO)		F=1:2.0~16
ELEMENT		6 GROUPS 8 ELEMENTS
PICTURE SIZE		13.8x18.4mm
ANGLE	VER. ANGLE	22.4°
	HOR. ANGLE	29.6°
	DIA. ANGLE	36.6°
DISTORTION (TV)		-0.17%
SHOOTING RANGE AT	VER.	75mm
MINIMUM FOCUS	HOR.	100mm
DISTANCE	DIA.	125mm
MINIMUM FOCUS DISTANCE		0.2m
FLANGE BACK		17.526mm in air
BACK FOCUS		15.2mm in air
FILTER SCREW SIZE		M37.5x0.5
FRONT/REAR EFFECTIVE DIA.		FRONT φ26.5mm REAR φ16.9mm
MOUNT		C-MOUNT
EXIT PUPIL		-26.6mm
TEMPERATURE RANGE		-10~+50° C
STORAGE TEMPERATURE RANGE		-20~+60° C
RESOLUTION CENTER/CORNER		CENTER 160本/mm CORNER 80本/mm
LENS COATING		WIDE BAND MULTI COATING
WEIGHT		210 g

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。




		尺度 1/1	承認 八木	製 富永 図
		機種名 φ23 F2.0 f=35mm		
		機種番 LM35XC		
2010.06.01	作成年月日			




LM35XC

Distortion at Infinity

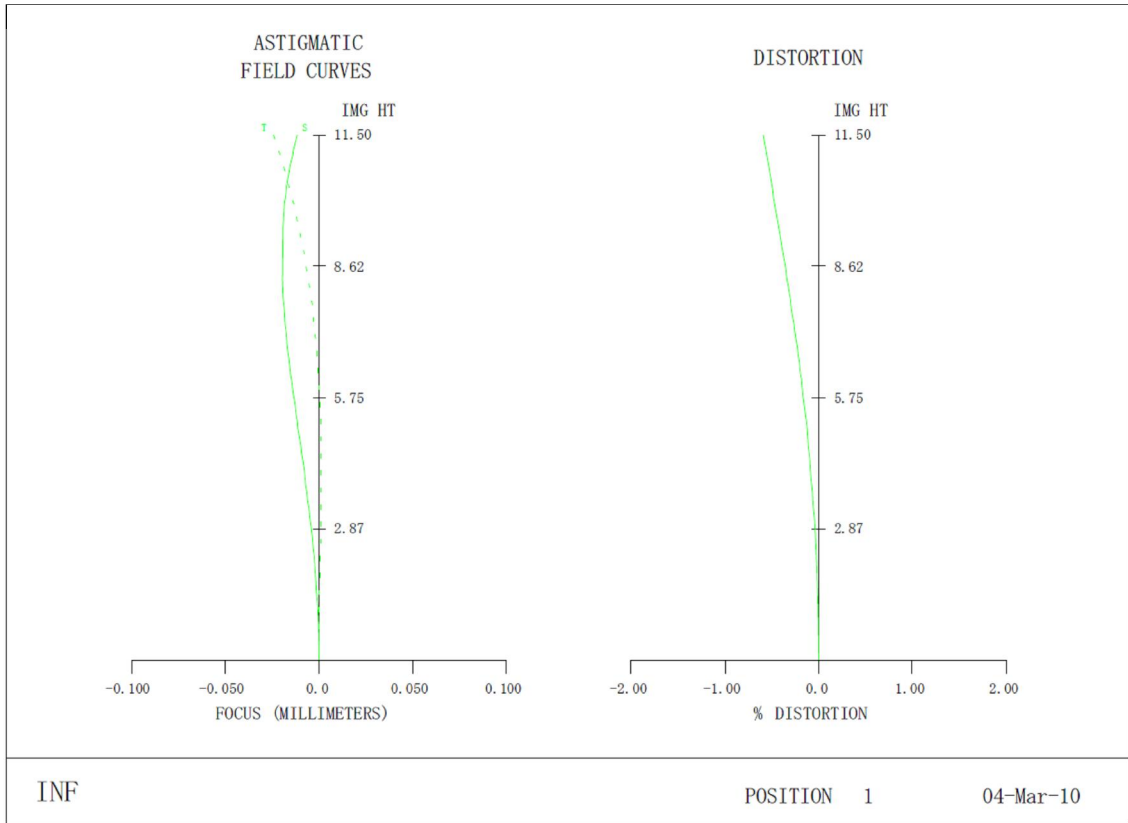

Distortion at 200mm

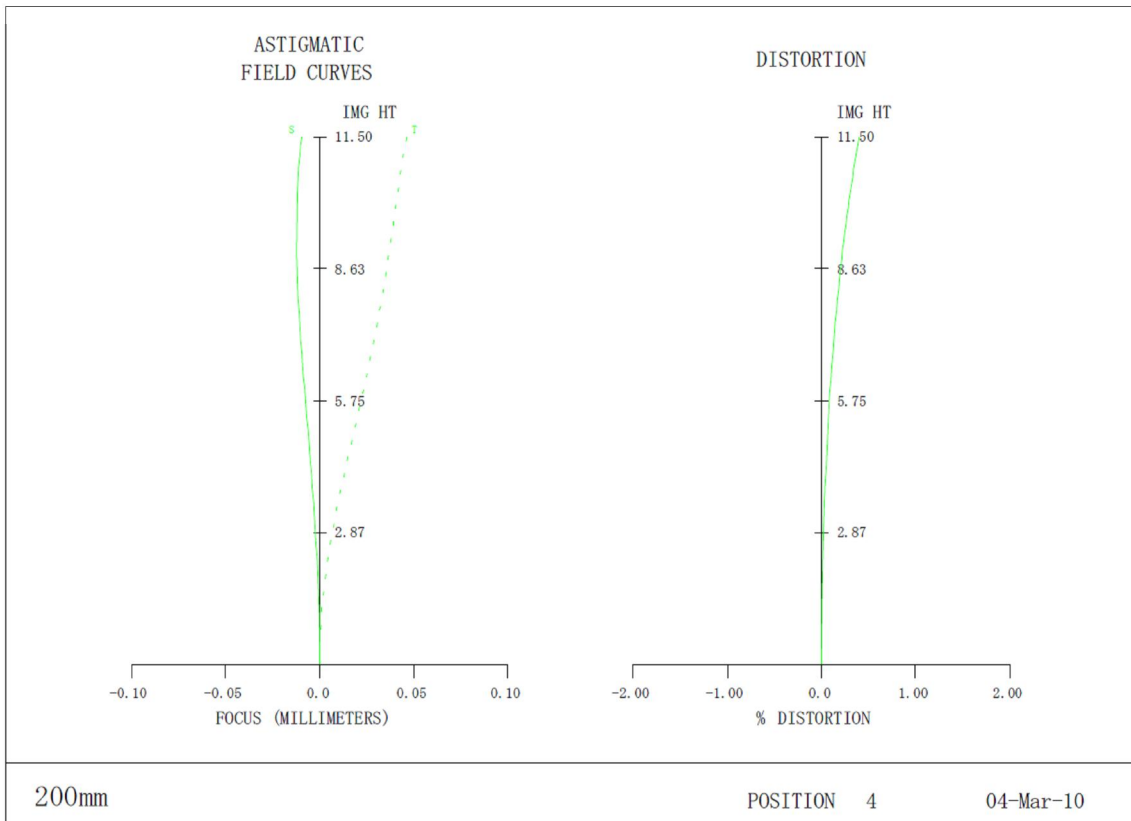





LM35XC

F-stop: 2.0

Working Distance: Infinity

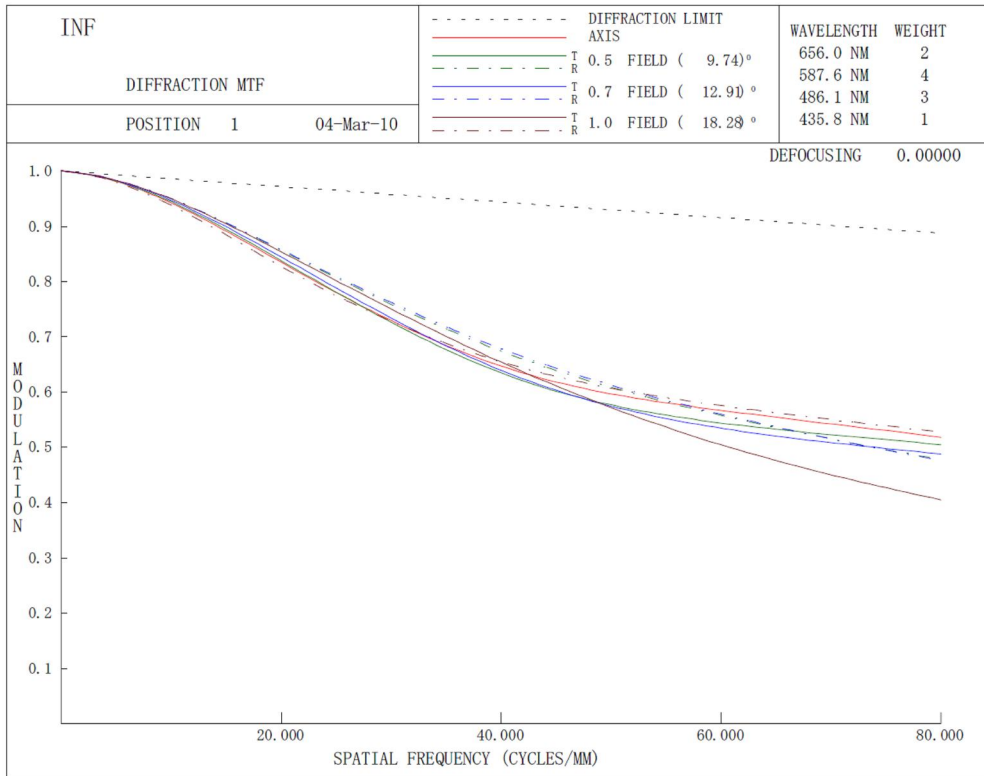


Working distance: 300mm

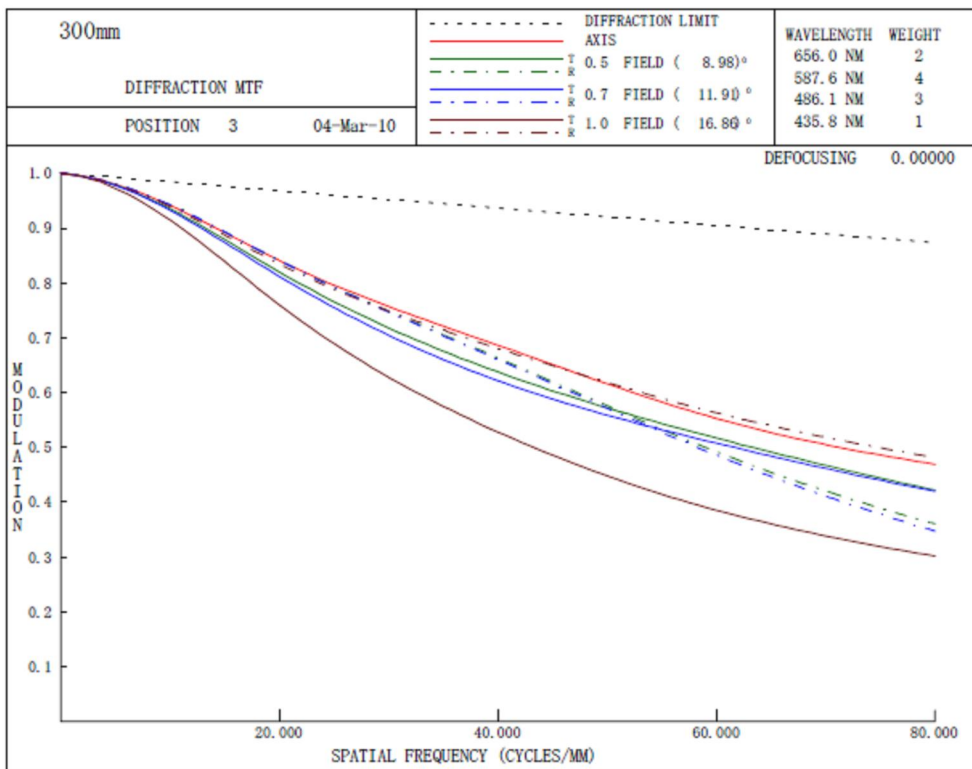



LM35XC

Relative Illumination

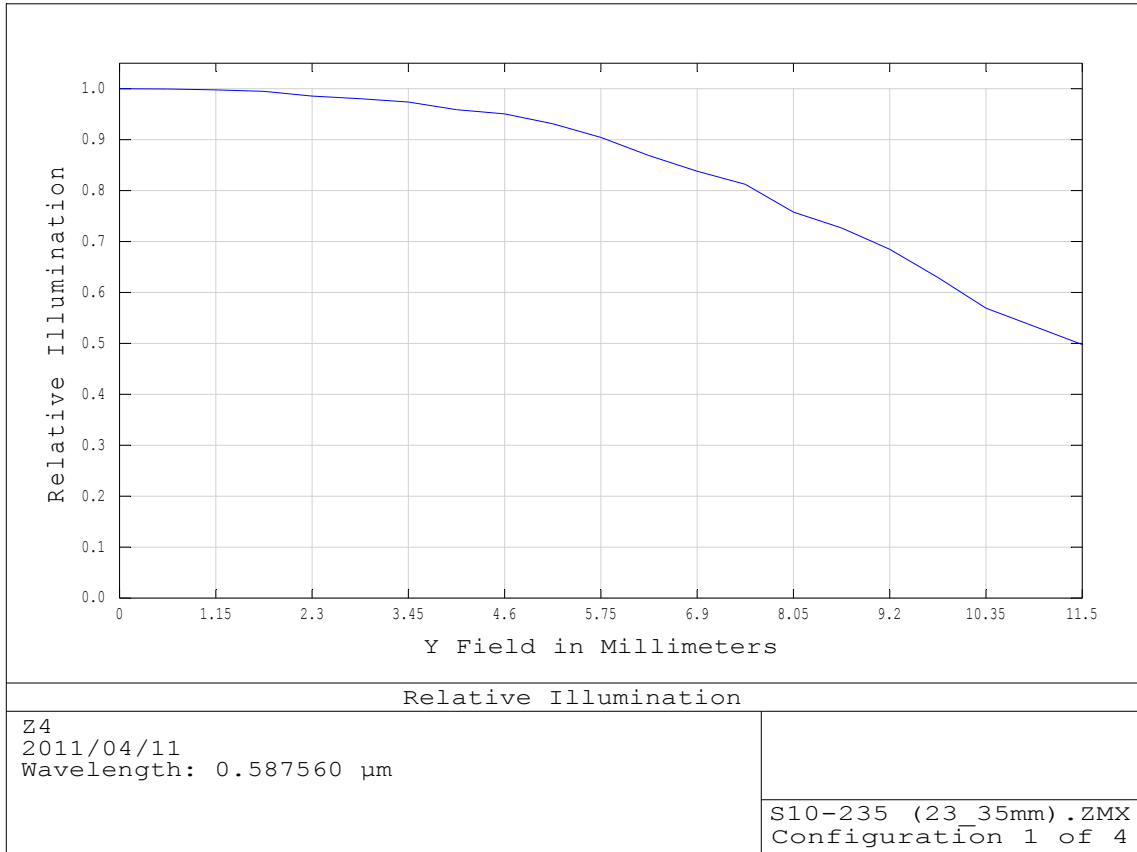



LM35XC Transmission

