

2/3" 2.8/50mm C		1/2"	1/3"
FOCAL LENGTH	f=50mm		
MAX. DIAMETER (RATIO)	F=1:2.8,4,8,16		
ELEMENT	4群 7枚		
PICTURE SIZE	6.6×8.8mm	4.8×6.4	3.6×4.8
ANGLE	VER. ANGLE HOR. ANGLE DIA. ANGLE	7.2° 9.6° 11.9°	5.2° 7.0° 8.7°
DISTORTION (T.V.)	-0.03%	-	-
SHOOTING RANGE AT	VER. HOR. DISTANCE	21.9 mm 29.3 mm 36.6 mm	16.0 21.3 26.6
MINIMUM FOCUS DISTANCE	0.2m		
FLANGE BACK	17.526 mm in air		
BACK FOCUS	35.5mm in air		
FILTER SCREW SIZE	M27.0x0.5		
FRONT/REAR EFFECTIVE DIA.	前Φ21.7mm 後Φ14.6mm		
MOUNT	C-MOUNT		
EXIT PUPIL	-63.7		
TEMPERATURE RANGE	-10~+50°C		
STORNG TEMPERATURE RANGE	-40~+60°C		
RESOLUTION CENTER/CORNER	中心100本/mm 周辺 80本/mm		
WEIGHT	9		


NOTE: Specifications and availability are subject to change without notice
注) 本仕様については、予告なしに変更する場合があります。

尺度	1/1	承認	八木	製図	八木
機種名	2/3" F2.8 f=50mm				
2014.2.24	作成年月日	LM50JCM-V			



LM50JCM-V

Relative Illumination

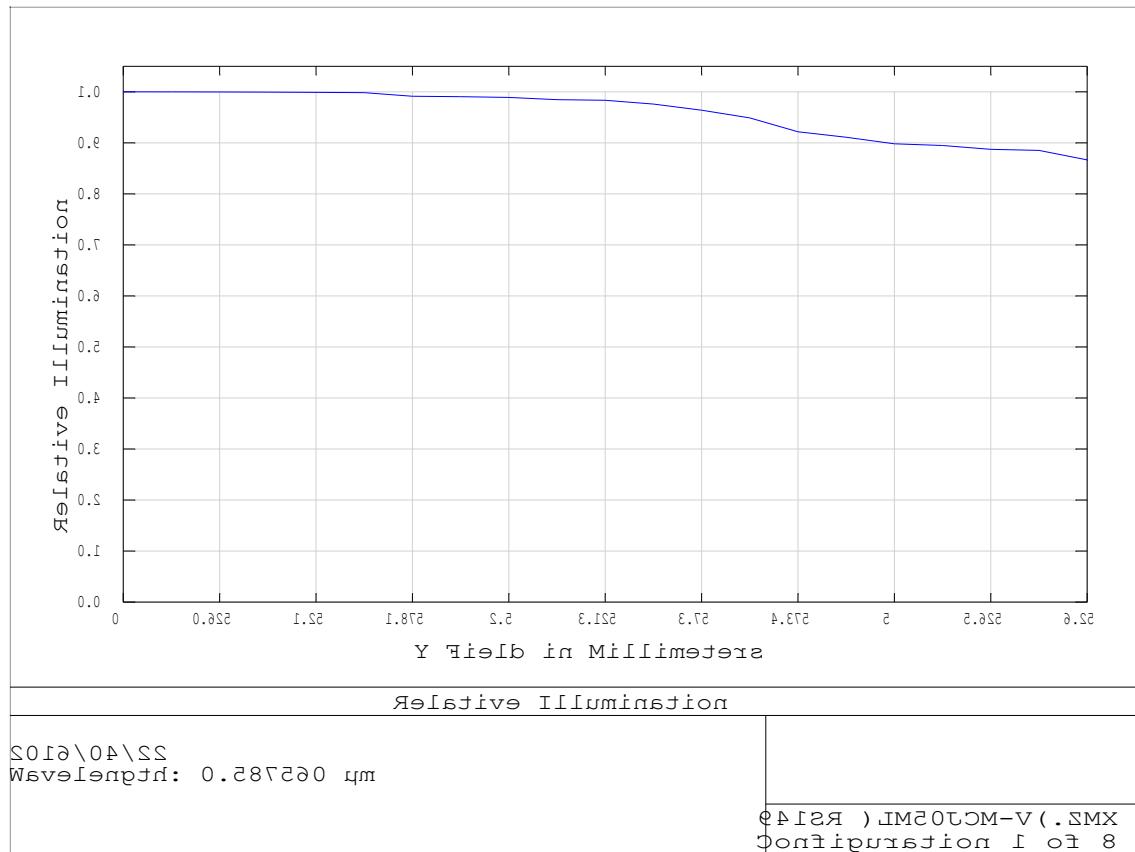



LM50JCM-V Transmission

