

φ23 2.0/50mm C		
FOCAL LENGTH		f=50mm
MAX. DIAMETER (RATIO)		F=1:2.0~22
ELEMENT		6 GROUPS 7 ELEMENTS
PICTURE SIZE		13.8x18.4mm
ANGLE	VER. ANGLE	15.7°
	HOR. ANGLE	20.6°
	DIA. ANGLE	25.4°
DISTORTION (TV)		0.8%
SHOOTING RANGE AT	VER.	75mm
MINIMUM FOCUS	HOR.	100mm
DISTANCE	DIA.	124mm
MINIMUM FOCUS DISTANCE		0.3m
FLANGE BACK		17.526mm in air
BACK FOCUS		21.6mm in air
FILTER SCREW SIZE		M37.5x0.5
FRONT/REAR EFFECTIVE DIA.		FRONT φ31.8mm REAR φ16.0mm
MOUNT		C-MOUNT
EXIT PUPIL		-19.1mm
TEMPERATURE RANGE		-10~+50°C
STORAGE TEMPERATURE RANGE		-20~+60°C
RESOLUTION CENTER/CORNER		CENTER 160本/mm CORNER 80本/mm
LENS COATING		WIDE BAND MULTI COATING
WEIGHT		220 g

NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。




		尺度 1/1	承認 八木	製 富永 図
		機種名 φ23 F2.0 f=50mm		
		機種番 LM50XC		
2010.06.01	作成年月日			




LM50XC

Distortion at Infinity

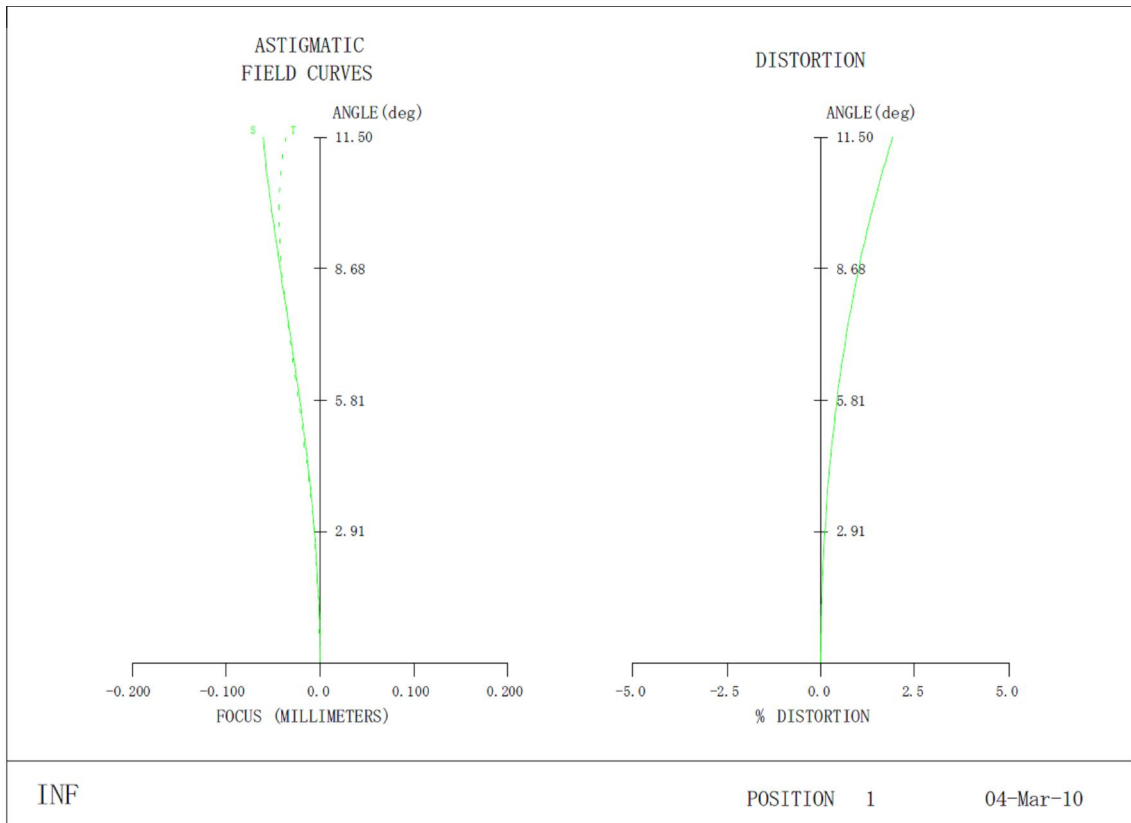


Distortion at 300mm

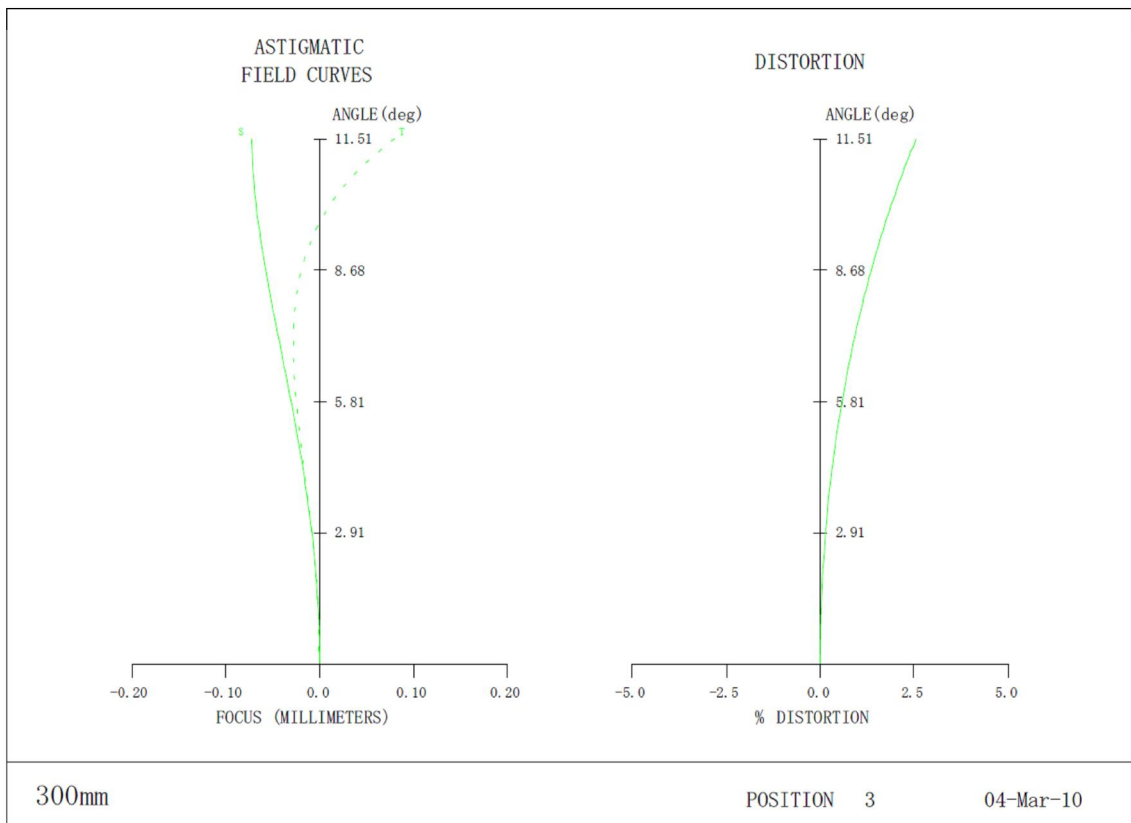




LM50XC

Relative Illumination

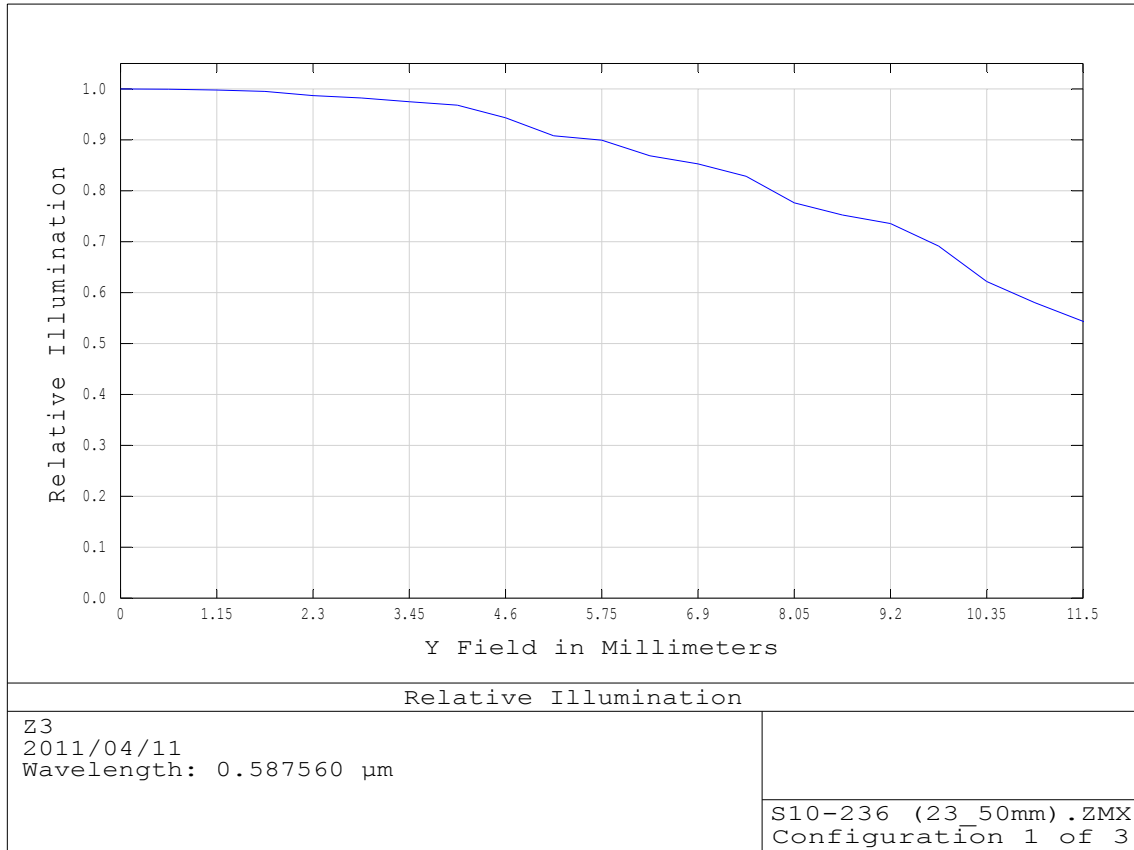



LM50-XC Transmission

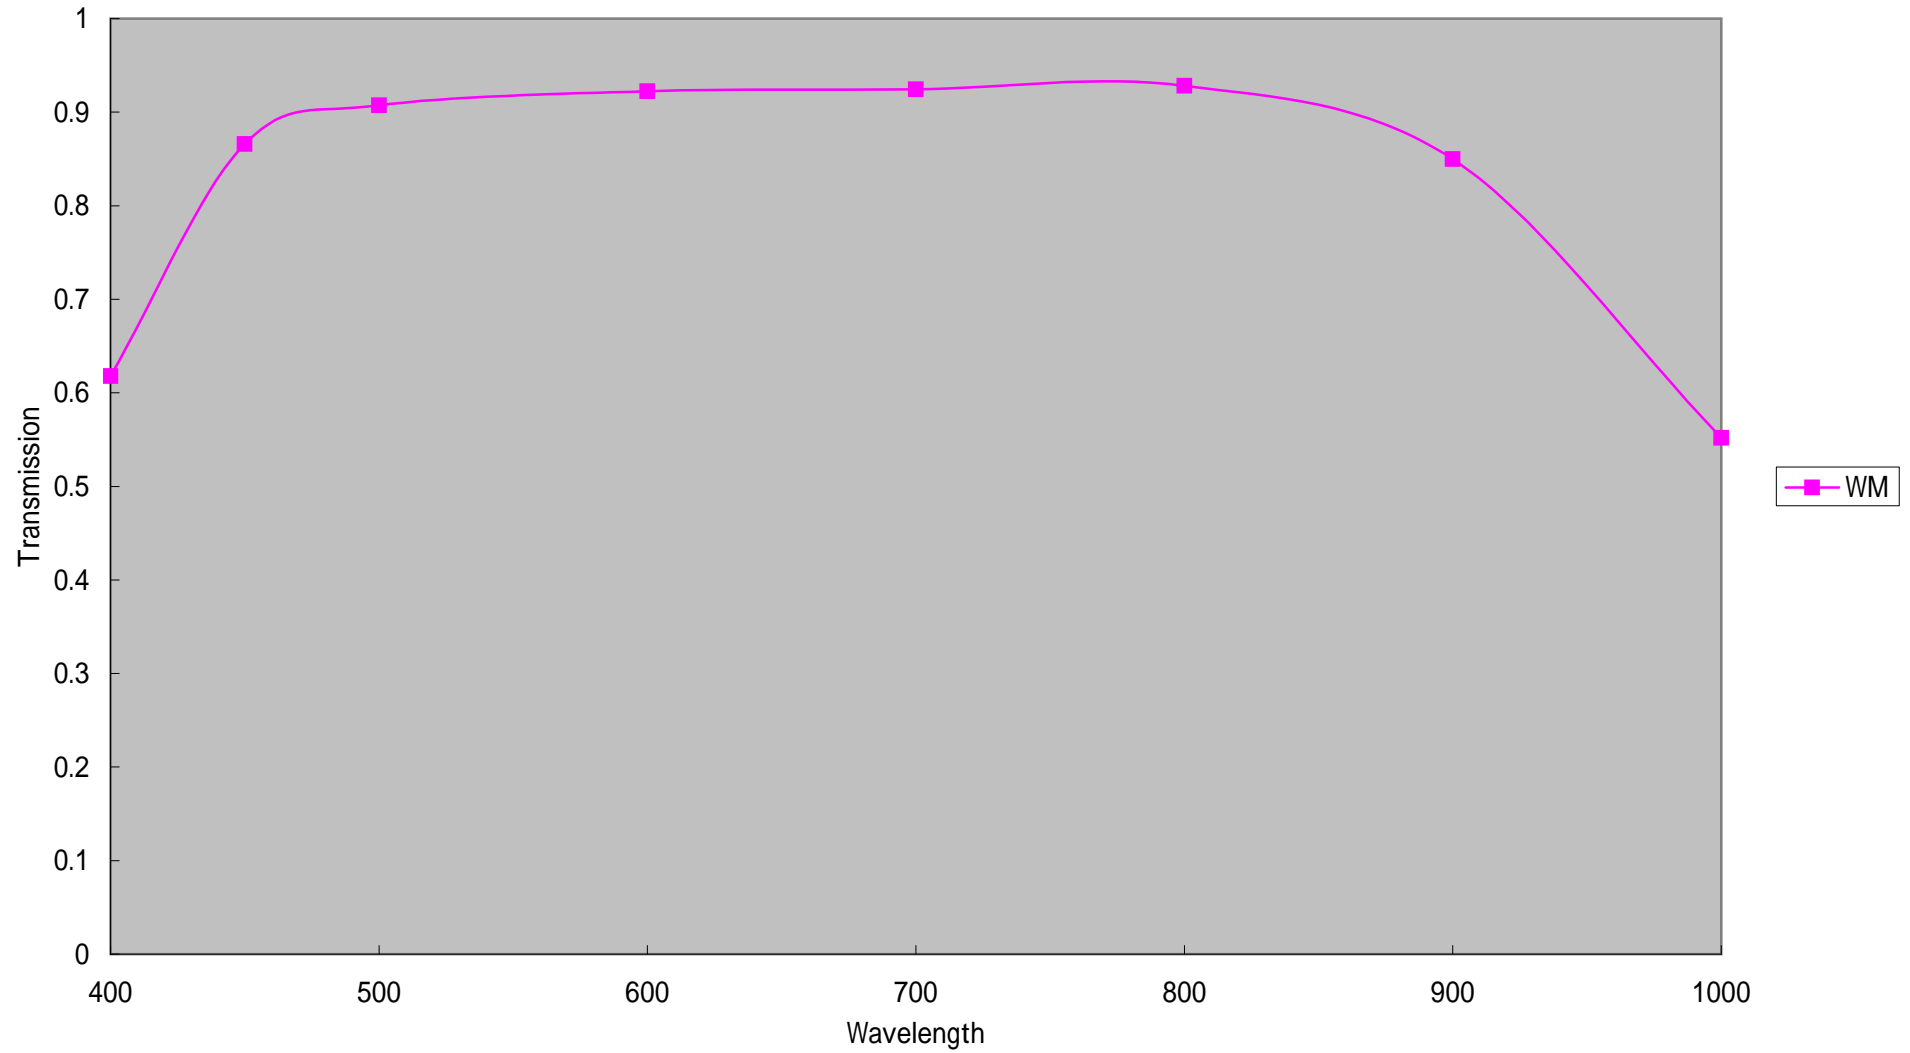



4/3type (23) F2.0/50mm

