


Thumbscrew  
Position selectable  
(120deg)



1" 1.4/16mm C	1"	2/3"	1/1.8"
FOCAL LENGTH	f=16mm		
MAX. DIAMETER (RATIO)	F=1 : 1.4~16		
PICTURE SIZE	9.6x12.8mm	6.6x8.8mm	5.4x7.2mm
ANGLE	VER. ANGLE	33.6°	23.2°
	HOR. ANGLE	44.3°	30.8°
	DIA. ANGLE	54.3°	38.3°
DISTORTION (TV)	-1.0%		
SHOOTING RANGE AT	VER.	186.2mm	126.8mm
MINIMUM FOCUS	HOR.	251.5mm	170.3mm
DISTANCE	DIA.	318.3mm	214.6mm
MINIMUM FOCUS DISTANCE		0.3m	
FLANGE BACK		12.6mm in air	
BACK FOCUS			
FILTER SCREW SIZE		M35.5x0.5	
FRONT/REAR EFFECTIVE DIA.		FRONT φ21.5mm	REAR φ18.8mm
MOUNT		C-MOUNT	
EXIT PUPIL		-128.5mm	
TEMPERATURE RANGE		-10~+50 °C	
STORAGE TEMPERATURE RANGE		-20~+60 °C	
RESOLUTION CENTER/CORNER		CENTER 120lp/mm	CORNER 80lp/mm
WEIGHT		150 g	

NOTE: Specifications and availability are subject to change without notice  
注)本仕様については、予告なしに変更する場合があります。

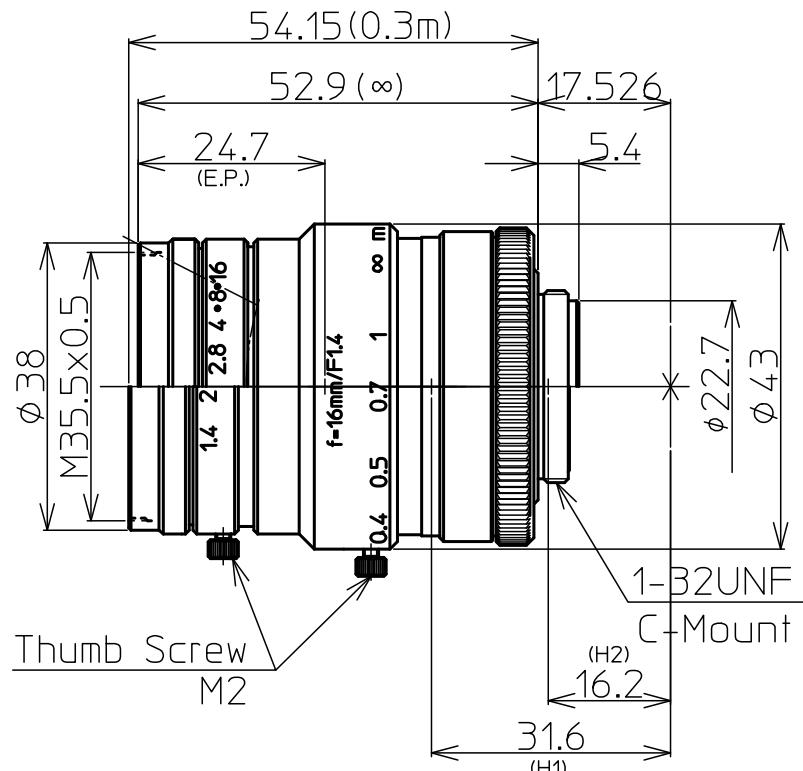


		尺度	1/1	工場番号	HR977NCN-3H
		機種名			1" F1.4 f=16mm
2015.7.30	正面図追加				
2014.12.25	更新	機種番			LM16HC
2013.4.15	作成年月日				




## LM16HC

F-stop: 2.0

Working Distance: Infinity

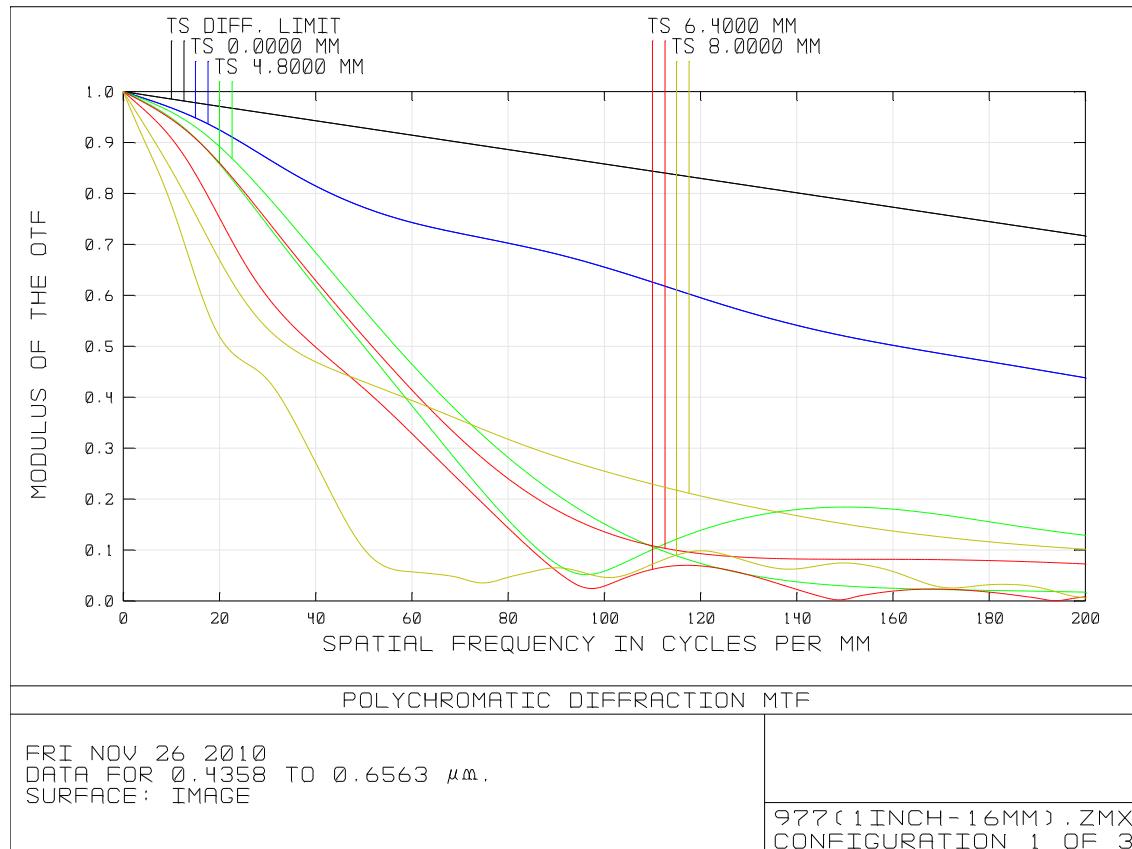


Working distance: 300mm

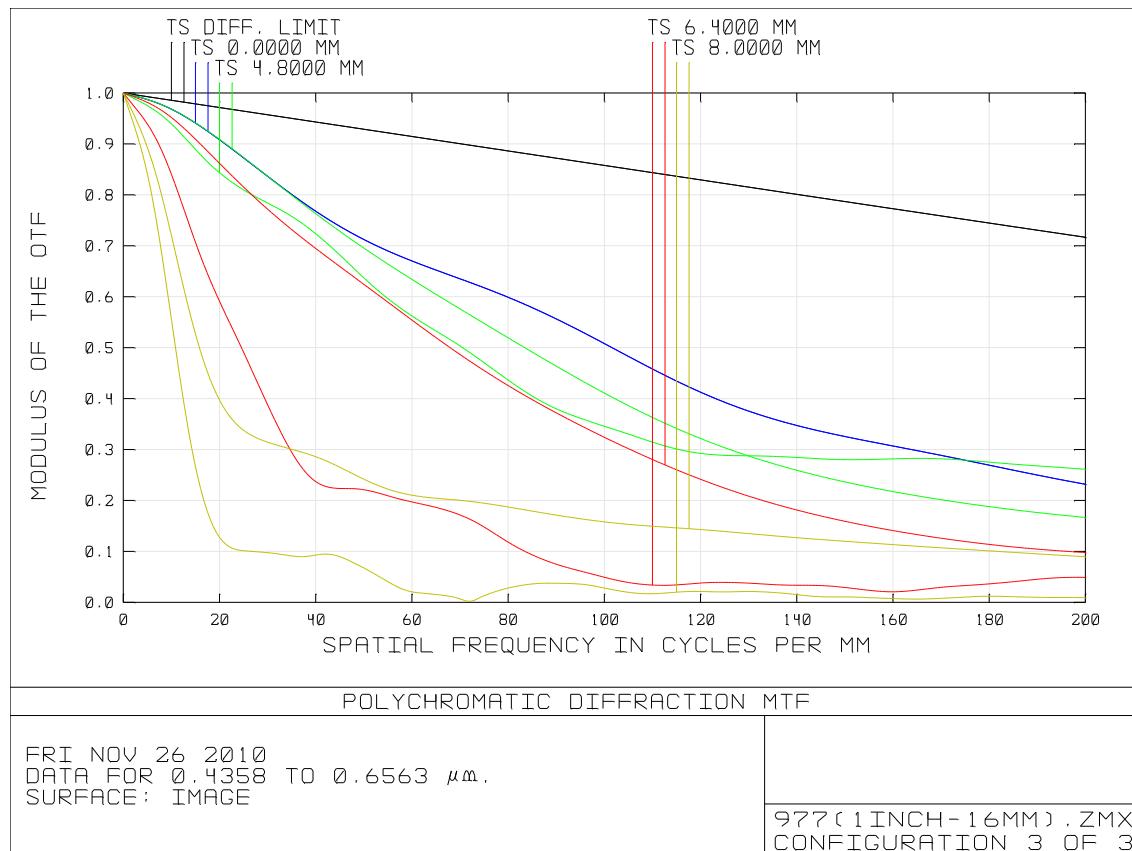




## LM16HC

F-stop: 1.4

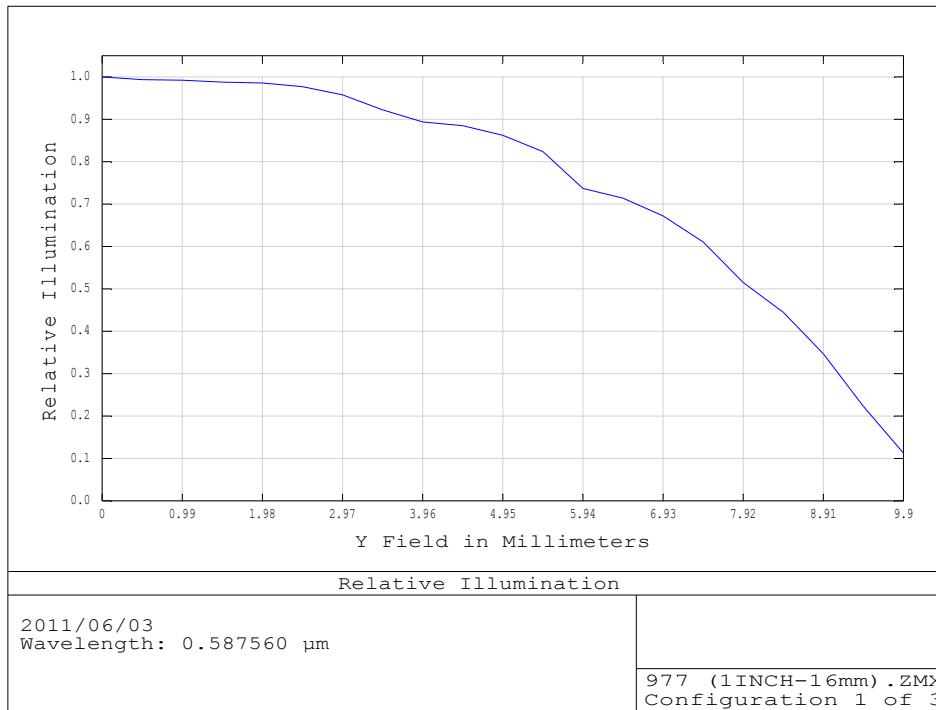

## 6: Transmission vs. Wavelength Plot 2

Update Settings Print Window Text Annotate Zoom

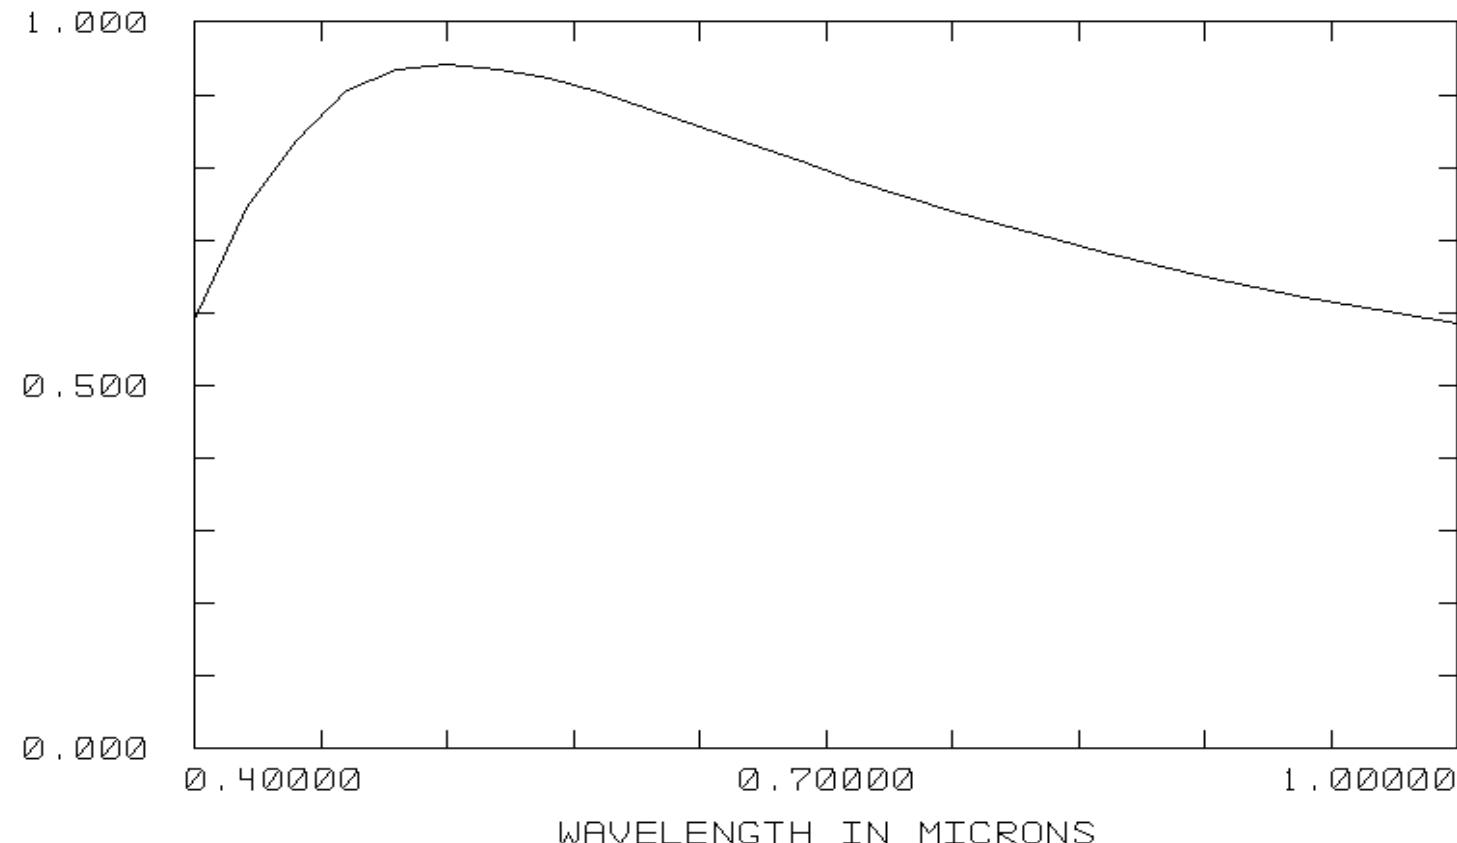

### TRANSMISSION VS. WAVELENGTH

MEGA1614  
WED SEP 27 2006  
FIELD POS: 0.0000, 0.0000 MM  
FIELD IS UNPOLARIZED.

C:\ZEMAX\ \MEGA1614.ZMX  
CONFIGURATION 1 OF 1

