

2" 2.8/35mm		2"	APS-C	4/3"
FOCAL LENGTH		f=35mm		
F-NUMBER		F=2.8-16		
PICTURE SIZE		25.6x19.6mm	22.3x16.7mm	18.4x13.8mm
ANGLE OF VIEW (°)	VER. ANGLE	30.7°	26.9°	22.3°
	HOR. ANGLE	40.2°	35.4°	29.5°
	DIA. ANGLE	49.1°	43.4°	36.4°
DISTORTION (TV)		0.12%	0.05%	-0.00%
FIELD OF VIEW (MINIMUM FOCUS DISTANCE)	VER.	57mm	50mm	41mm
	HOR.	76mm	67mm	55mm
	DIA.	96mm	83mm	69mm
MINIMUM FOCUS DISTANCE		0.1m		
FLANGE BACK		17.526mm in air		
BACK FOCUS		19.5mm in air		
FILTER SCREW SIZE		M52x0.75		
FRONT/REAR EFFECTIVE DIA.		FRONT ϕ 44.0mm		REAR ϕ 26.6mm
MOUNT		M35x0.75		
EXIT PUPIL		-53.4mm		
TEMPERATURE RANGE		-10~+50 °C		
STORAGE TEMPERATURE RANGE		-20~+60 °C		
RESOLUTION CENTER/CORNER		CENTER 160lp/mm		CORNER 100lp/mm
WEIGHT		375g		


NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。



		尺度	1/1	工場番号	LM35VM35
		機種名	2" F2.8 / f=35mm		
		機種番	LM35VM35		
2020.12.8	作成年月日				S10-682

Field Curvature

S T
+Y

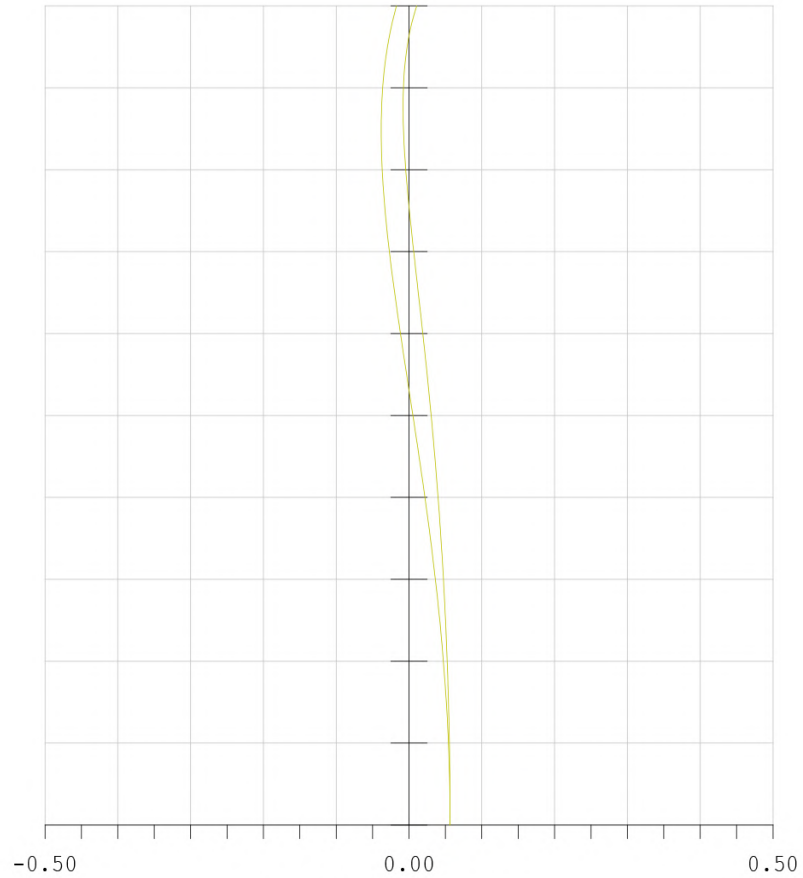


Millimeters

Field units changed to field angle

Distortion

+Y

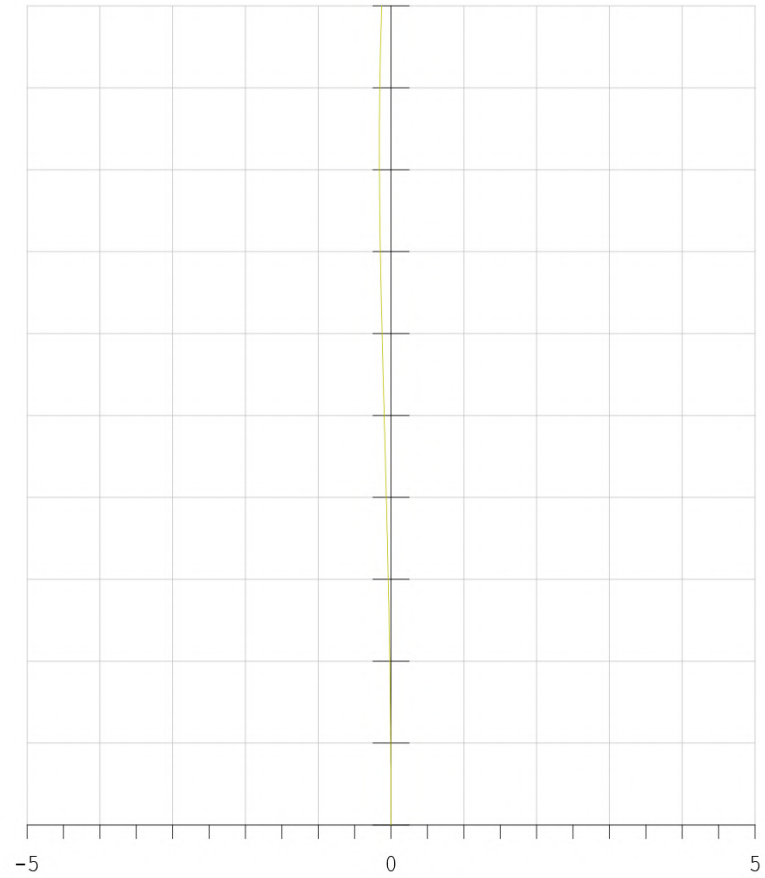

Percent


Field Curvature / F-Tan(Theta) Distortion

LM35VM (2inch f=35mm F2.8)

Maximum Field is 22.522 Degrees.

Wavelengths: 0.588



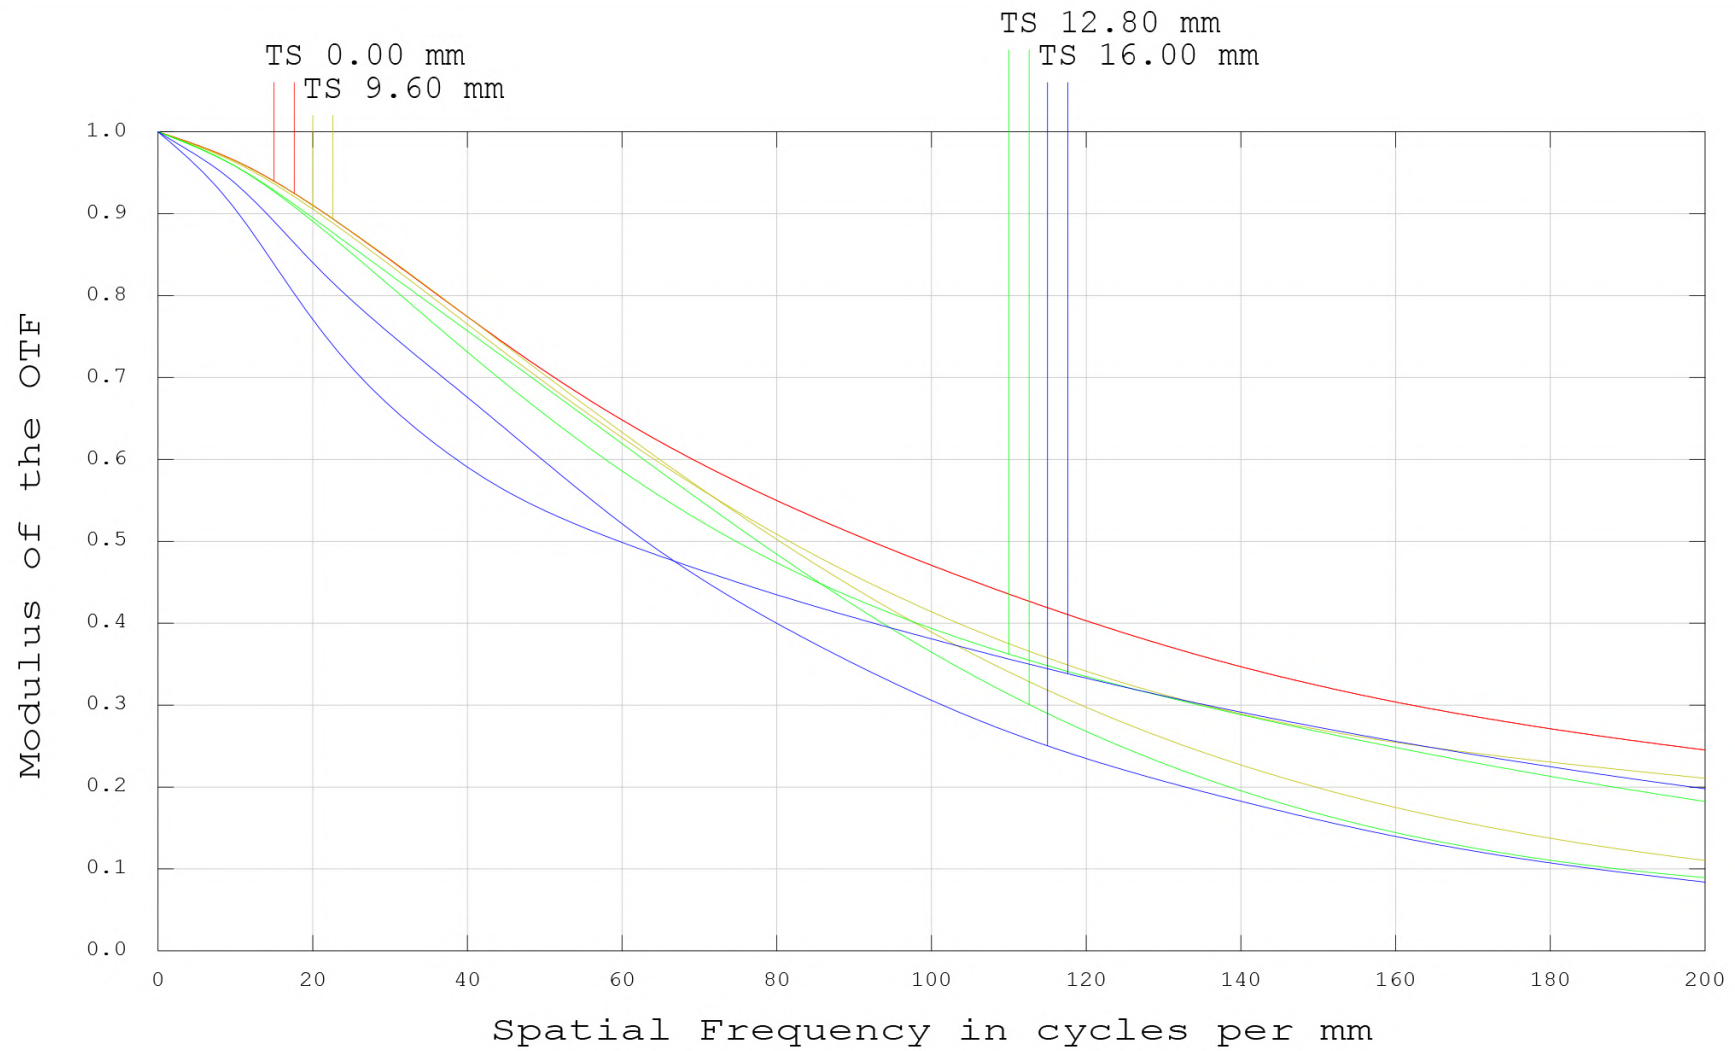


Polychromatic Diffraction MTF

LM35VM (2inch f=35mm F2.8)

Data for 0.4358 to 0.6563 μm .
Surface: Image



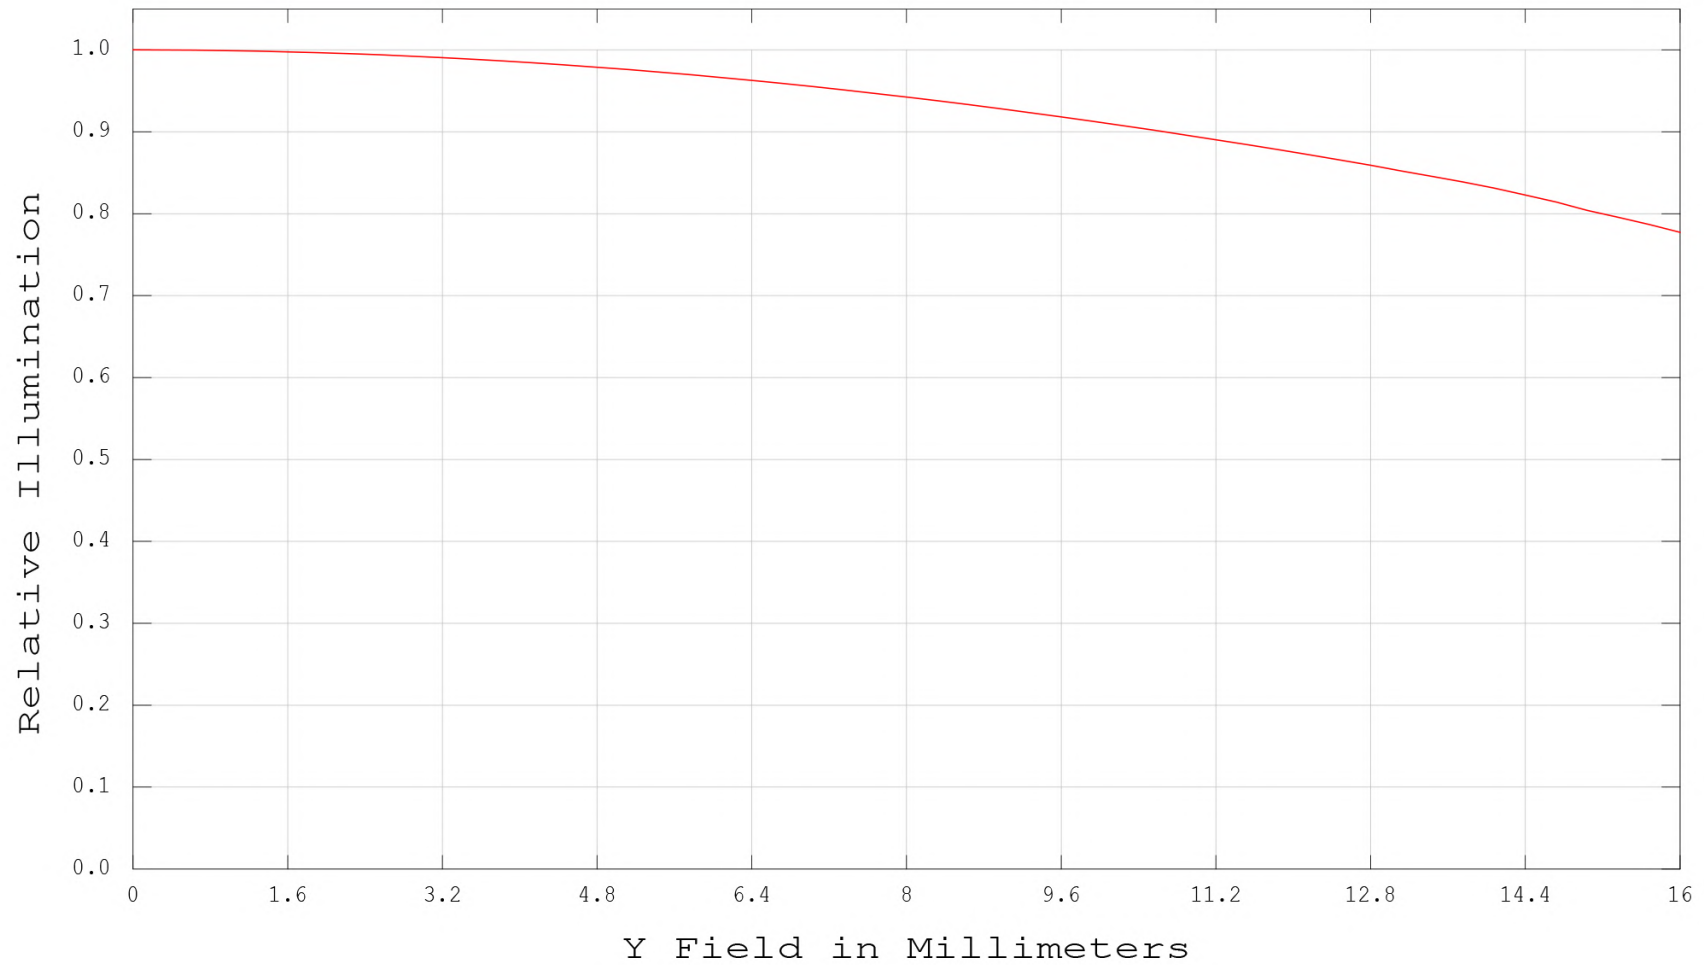

Relative Illumination

LM35VM (2inch f=35mm F2.8)

Wavelength: 0.587562 μm



LM35VM Transmission

