

2/3" 2.8/35mm C	2/3"	1/1.8"	1/2"
FOCAL LENGTH	f=35mm		
F-NUMBER	F=2.8-16		
PICTURE SIZE	6.6x8.8mm	5.4x7.2mm	4.8x6.4mm
ANGLE OF VIEW (∞)	VER. ANGLE	10.6°	8.7°
	HOR. ANGLE	14.0°	11.5°
	DIA. ANGLE	17.5°	14.4°
DISTORTION (TV)	-0.02%	0.00%	0.00%
FIELD OF VIEW (MINIMUM FOCUS DISTANCE)	VER.	36mm	30mm
	HOR.	48mm	39mm
	DIA.	61mm	49mm
MINIMUM FOCUS DISTANCE	0.2m		
FLANGE BACK	17.526mm in air		
BACK FOCUS	13.28mm in air		
FILTER SCREW SIZE	M30.5x0.5		
FRONT/REAR EFFECTIVE DIA.	FRONT φ15.5mm		REAR φ15.0mm
MOUNT	C-MOUNT		
EXIT PUPIL	-55.5mm		
TEMPERATURE RANGE	-10~+50°C		
STORAGE TEMPERATURE RANGE	-20~+60°C		
RESOLUTION CENTER/CORNER	CENTER 160lp/mm		CORNER 125lp/mm
WEIGHT	50g		


NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。



		尺度	1/1	工場番号	LM35JC5MC
		機種名	2/3" f=35mm F2.8		
		機種番	LM35JC5MC		
2021.04.23	作成年月日				

Field Curvature

S.T
+Y

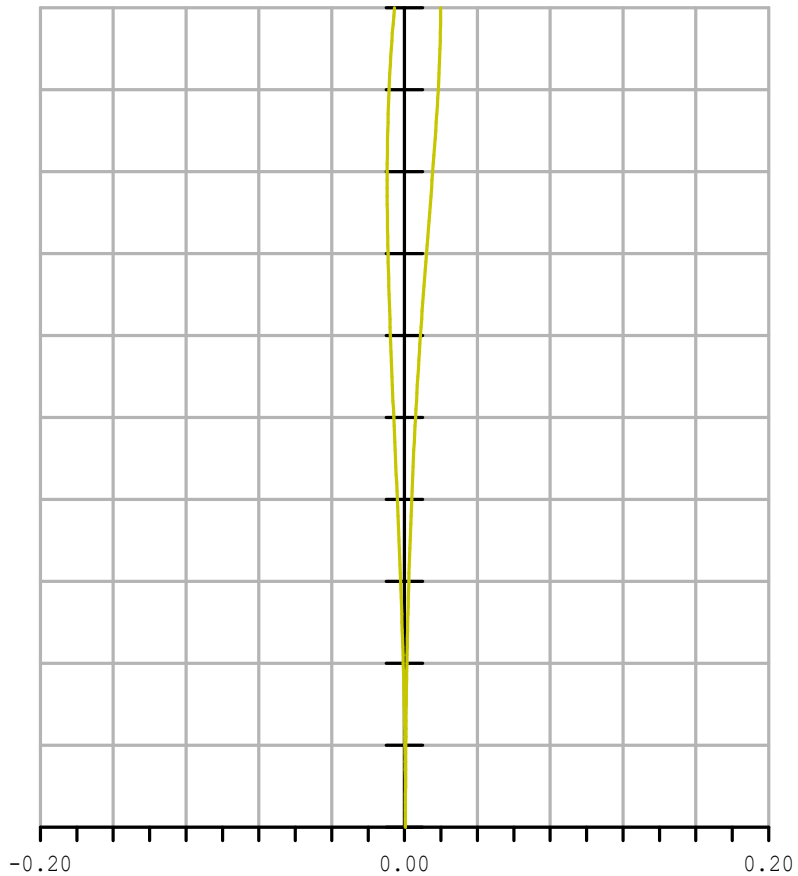


Millimeters

Field units changed to field angle

Distortion

+Y

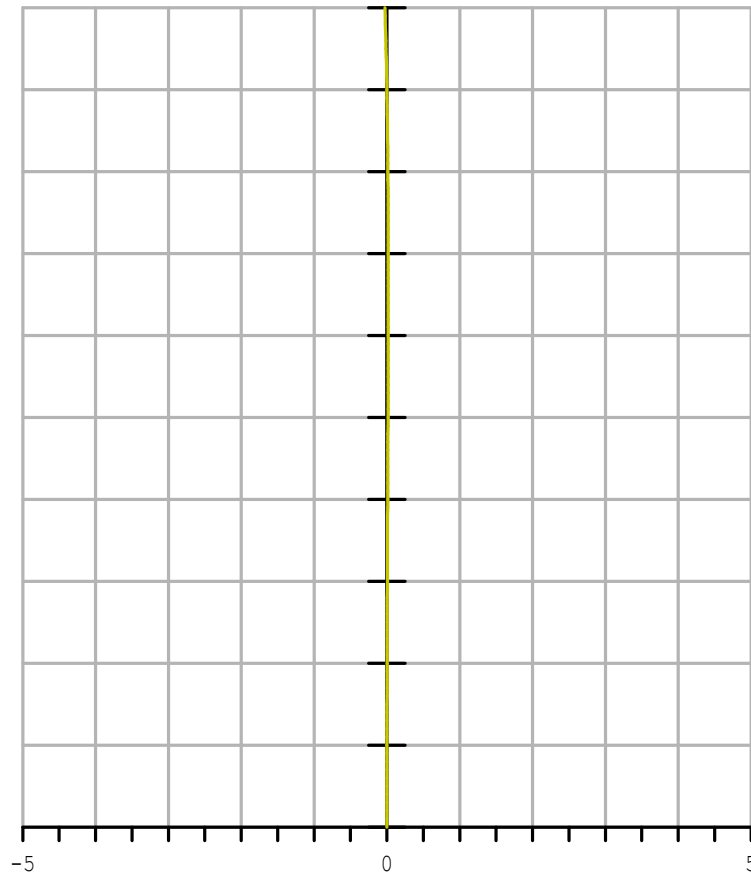

Percent


Field Curvature / F-Tan(Theta) Distortion

LM35JC5MC (F2.8)

Maximum Field is 8.443 Degrees.

Wavelengths: 0.588



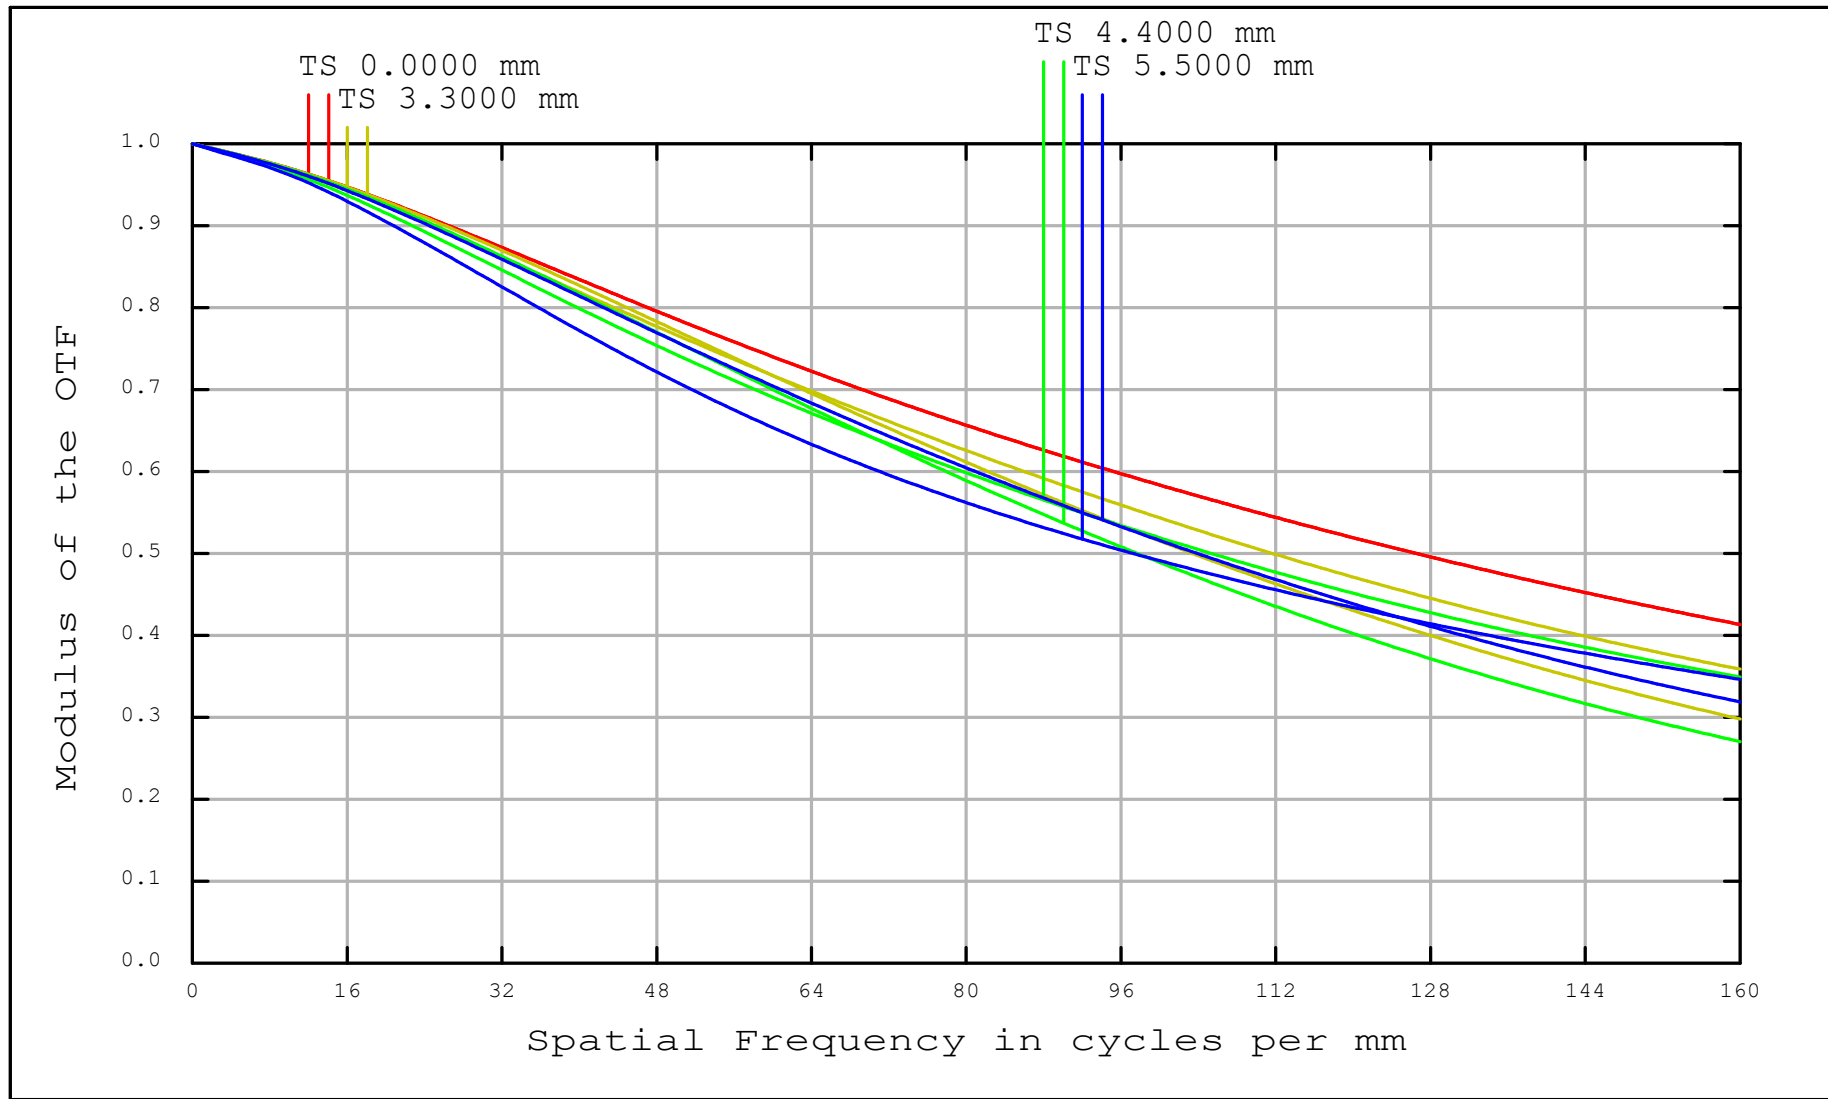


Polychromatic Diffraction MTF

LM35JC5MC (F2.8)

Data for 0.4358 to 0.6563 μm .

Surface: Image



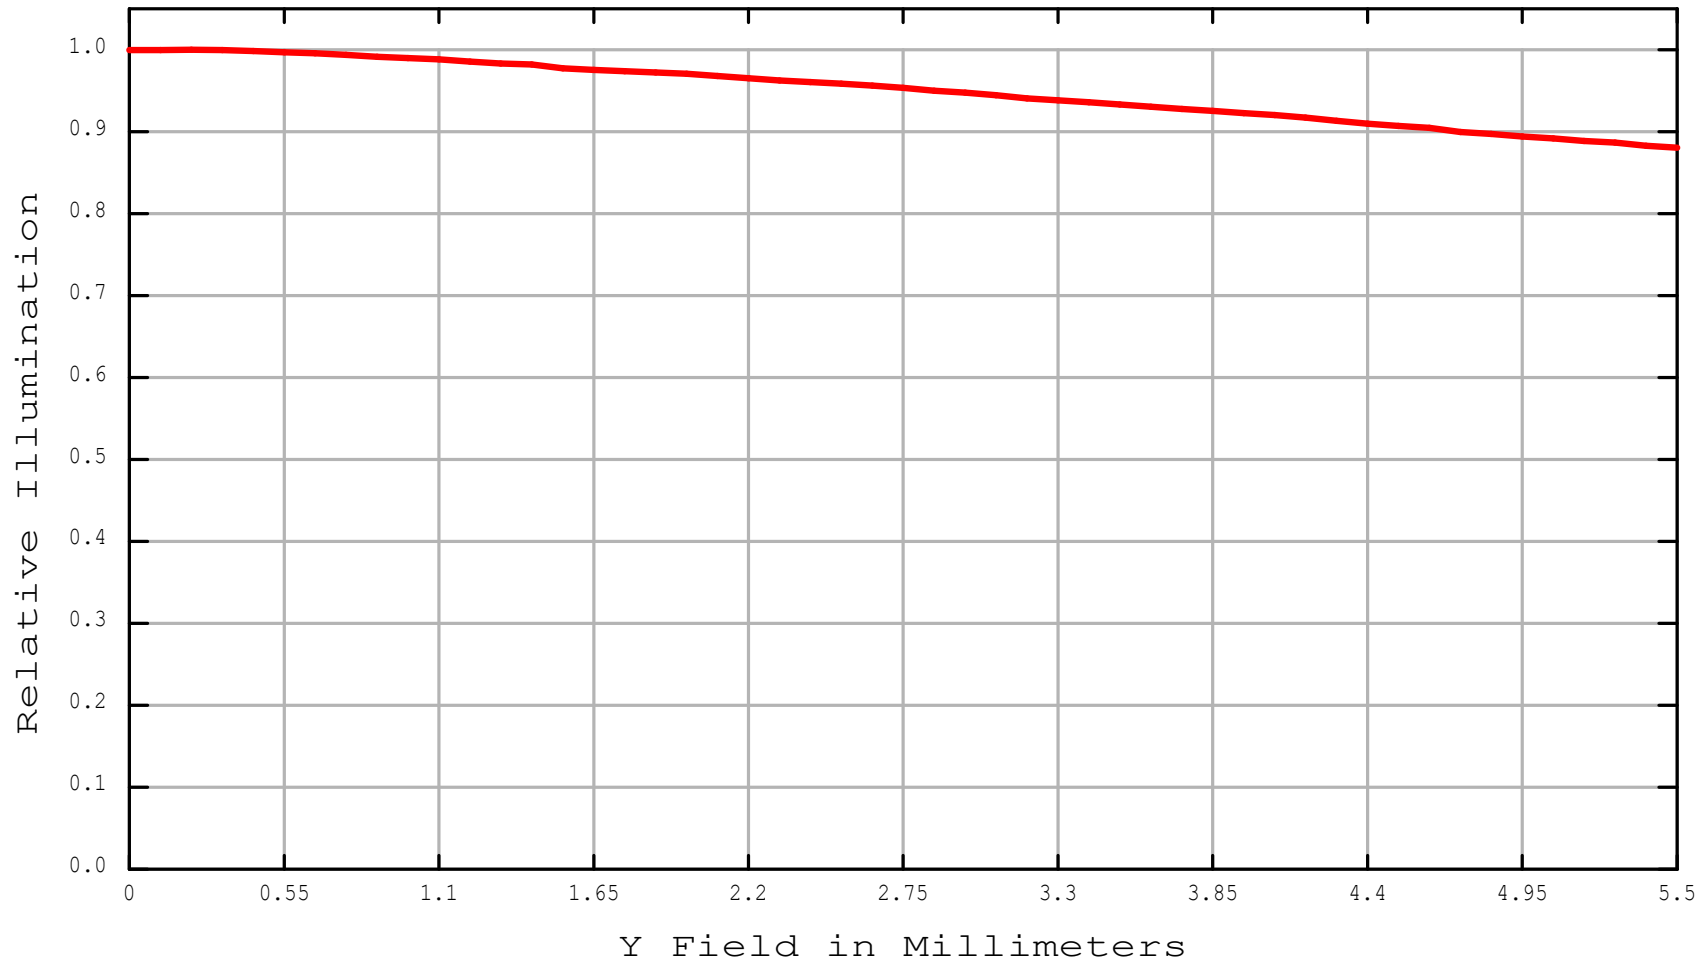

Relative Illumination

LM35JC5MC (F2.8)

Wavelength: 0.587560 μm



LM35JC5MC Transmission

