


2/3" 1.4/6mm C		1/2"	1/3"
FOCAL LENGTH		f=6mm	
MAX. DIAMETER (RATIO)		F=1:1.4~16	
ELEMENT		8 Elements in 7 Groups	
PICTURE SIZE		6.6x8.8mm	4.8x6.4
ANGLE	VER. ANGLE	61.2°	44.5°
	HOR. ANGLE	81.9°	59.4°
	DIA. ANGLE	102.9°	74.3°
DISTORTION (TV)		-10.7%	-5.0%
SHOOTING RANGE AT	VER.	251mm	173.3mm
MINIMUM FOCUS	HOR.	367mm	241.4mm
DISTANCE	DIA.	530mm	320.8mm
MINIMUM FOCUS DISTANCE		0.1m	0.2m 光学保証範囲
FLANGE BACK		17.526	mm in air
BACK FOCUS		11.3mm	in air
FILTER SCREW SIZE		----	
FRONT/REAR EFFECTIVE DIA.		Front: Ø 21.5mm	Rear: Ø 11.0mm
MOUNT		C-MOUNT	
EXIT PUPIL		-30.2	
TEMPERATURE RANGE		-10~+45°C	
STORING TEMPERATURE RANGE		-40~+60°C	
RESOLUTION CENTER/CORNER		Center 100line/mm	Corner 60line/mm
WEIGHT		63g	

注)本仕様書については、予告なしに変更する場合があります。



		尺度	1/1	承認	製図
		機種名	LM6JC		
		機種番	2/3" 1.4/6mm		
04.12.13	作成年月日				

# LM6JC distortion

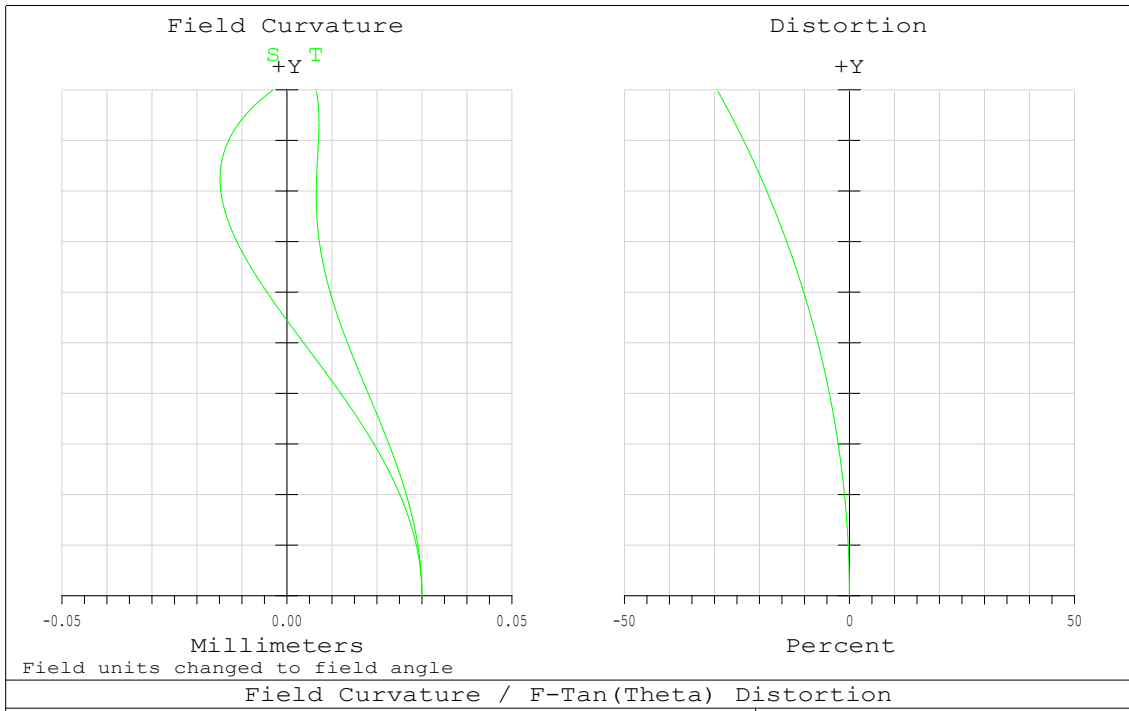

# LM6JC

