

2/3" 0.4x (0.346x ~ 0.44x) TELECENTRIC				
MAGNIFICATION		0.4x	0.44x	0.346x
N.A.(OBJECT)		0.04	0.04	0.04
ELEMENT	9GROUPS 12ELEMENTS			
IMAGE SIZE		6.6x8.8mm	6.6x8.8mm	6.6x8.8mm
SHOOTING RANGE	VERTICAL	16.5mm	15.0mm	19.1mm
	HORIZONTAL	22.0mm	20.0mm	25.4mm
	DIAMETER	27.5mm	25.0mm	31.8mm
DISTORTION	(TV)	-0.009%	0.01%	0.02%
WORKING DISTANCE		112.7mm	112.7mm	112.7mm
FLANGE BACK	17.526mm in air			
FRONT/REAR EFFECTIVE DIA.	FRONT ϕ 42.2mm REAR ϕ 15.5mm			
MOUNT	C-MOUNT			
EXIT PUPIL		2619.1mm	116.6mm	-54.6mm
TEMPERATURE RANGE	-10~+50 °C			
STORAGE TEMPERATURE RANGE	-20~+60 °C			
RESOLUTION	120lp/mm			
TELECENTRICITY	99%			
WEIGHT	395g			


NOTE: Specifications and availability are subject to change without notice
 注) 本仕様については、予告なしに変更する場合があります。



		尺度	1/2	工場番号	TL1125
		機種名	0.4x VARIFOCAL TELECENTRIC LENS		
2015.4.20	更新	機種番	LM1125TC 外観図		
2015.2.9	作成年月日				

Field Curvature

S T
+Y

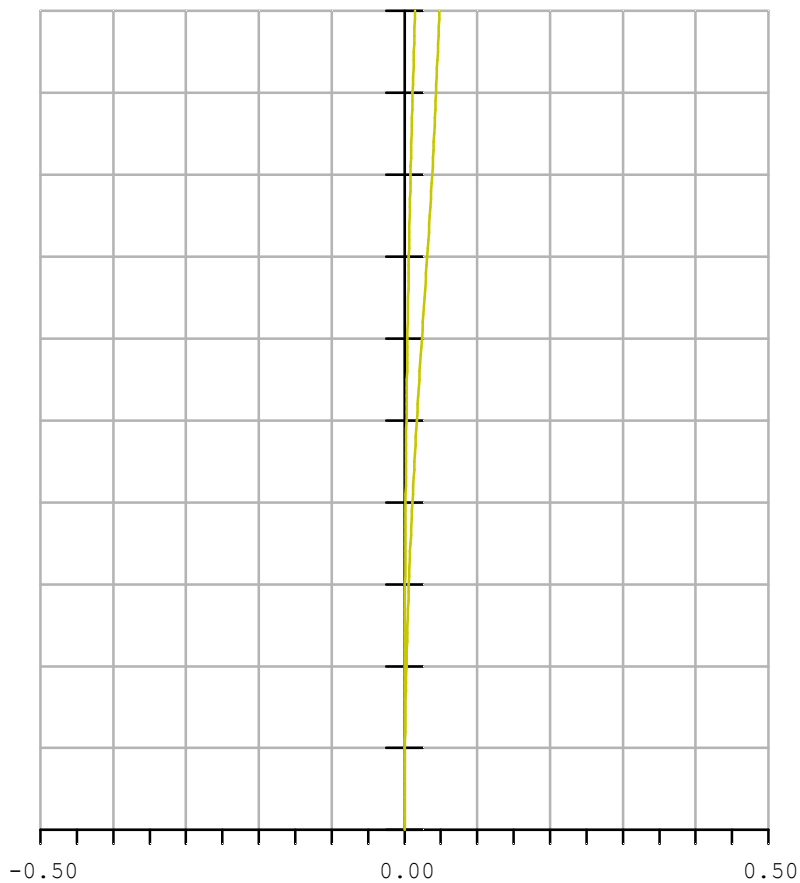


Millimeters

Field units changed to field angle

Distortion

+Y

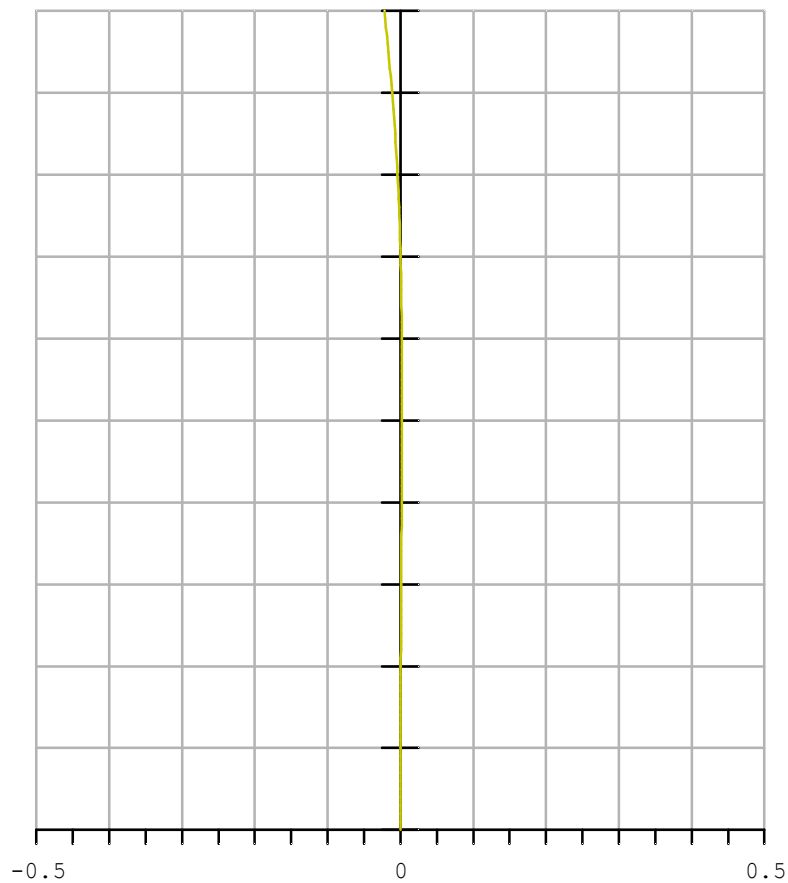

Percent

Field Curvature / F-Tan(Theta) Distortion

LM1125TC (4X)

Maximum Field is 0.149 Degrees.

Wavelengths: 0.588

